


Ferrite cores for RFID transponders

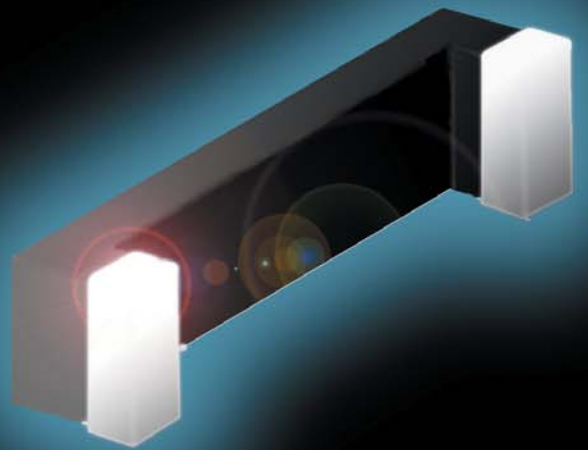

Introduction

Transponders are electronic devices capable of sending short RF messages upon request. These messages are commonly used to identify something where the transponder is attached, but can be used to send data as well. The term transponder comes from TRANSMitter/resPONDER.

There are many different types of transponders, depending on the final use of the transponder, and on the operating frequency. Low Frequency Magnetic Communication (below 500 kHz) commonly uses ferrite cores to increase the performance (and distance range) of the transponder.

Ferroxcube provides a wide range of ferrite cores fitting many of the existing market requirements, as well as years of experience in designing custom shapes for specific needs. New

materials have been developed improving temperature stability and reaching higher permeability values. In addition, advanced features like metallized contacts or tighter tolerances on mechanical and electrical parameters are feasible.

Newly developed materials include 4B2 and 4B4 improving the temperature stability and robustness of the complete system thanks to their high density structure. Also 3B7 has been optimized for the transponder shapes. Ferroxcube materials cover a wide range of needs, from temperature stability with αF as low as 1 (from -40 to 85 °C) to high Q factor with $tg \delta/\mu$ lower than 100×10^{-6} at 500 kHz. They are available in Nickel Zinc (4B1, 4B2, 4B4) high resistivity and Manganese Zinc (3C90, 3B7).

Special features

PVD metallized terminals on request.
Best adhesion ferrite-metallization-PCB.
High accuracy layer thickness and size of the footprint.
Low height metallization provides optimum Q factor.

Tightest length tolerance.
Absolute tolerance down to ± 0.1 mm.
Minimizes the spread in electrical properties.



Advanced features


Diameter tolerance down to ± 0.015 mm on ground rods.
Length tolerance down to ± 0.2 mm on rods.
Inductance sorting out in groups of $\pm 1\%$.
Minimum rod diameter down to 0.3 mm.
Parylene-C coating on rods and other shapes.
Metallized terminals in Silver Palladium for SMD products.
Custom shapes available on request.

NiZn materials for high freq uncoated cores

		4B1	4B2*	4B4*
μ	25 °C; ≤ 10 kHz; 1mT	$250 \pm 20\%$	$250 \pm 20\%$	$450 \pm 20\%$
α (K ⁻¹)	-40 to 85 °C; ≤ 10 kHz; 1mT	$\approx 25 \times 10^{-6}$	$\approx 1 \times 10^{-6}$	$\approx 0 \times 10^{-6}$
$tg \delta/\mu$	25 °C; 3 MHz; 1mT	$< 300 \times 10^{-6}$	$< 300 \times 10^{-6}$	$< 1000 \times 10^{-6}$
T_c (°C)		> 250	> 335	> 115




* New!!

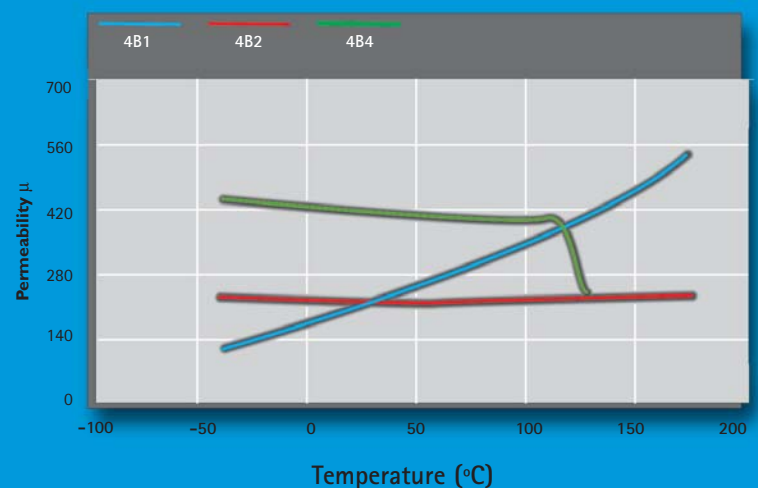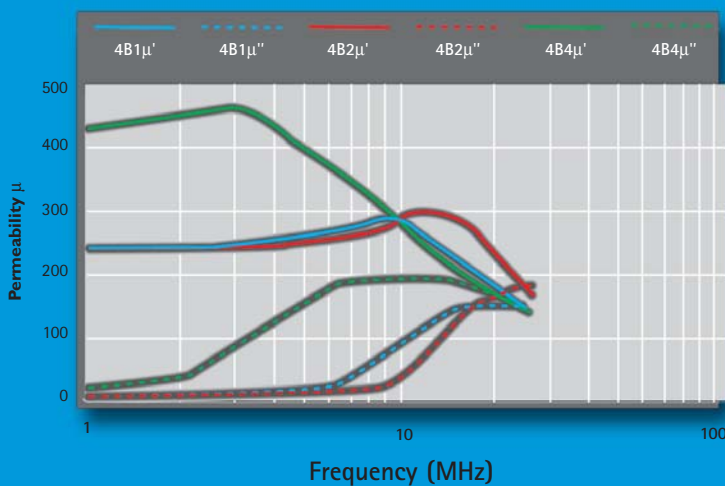

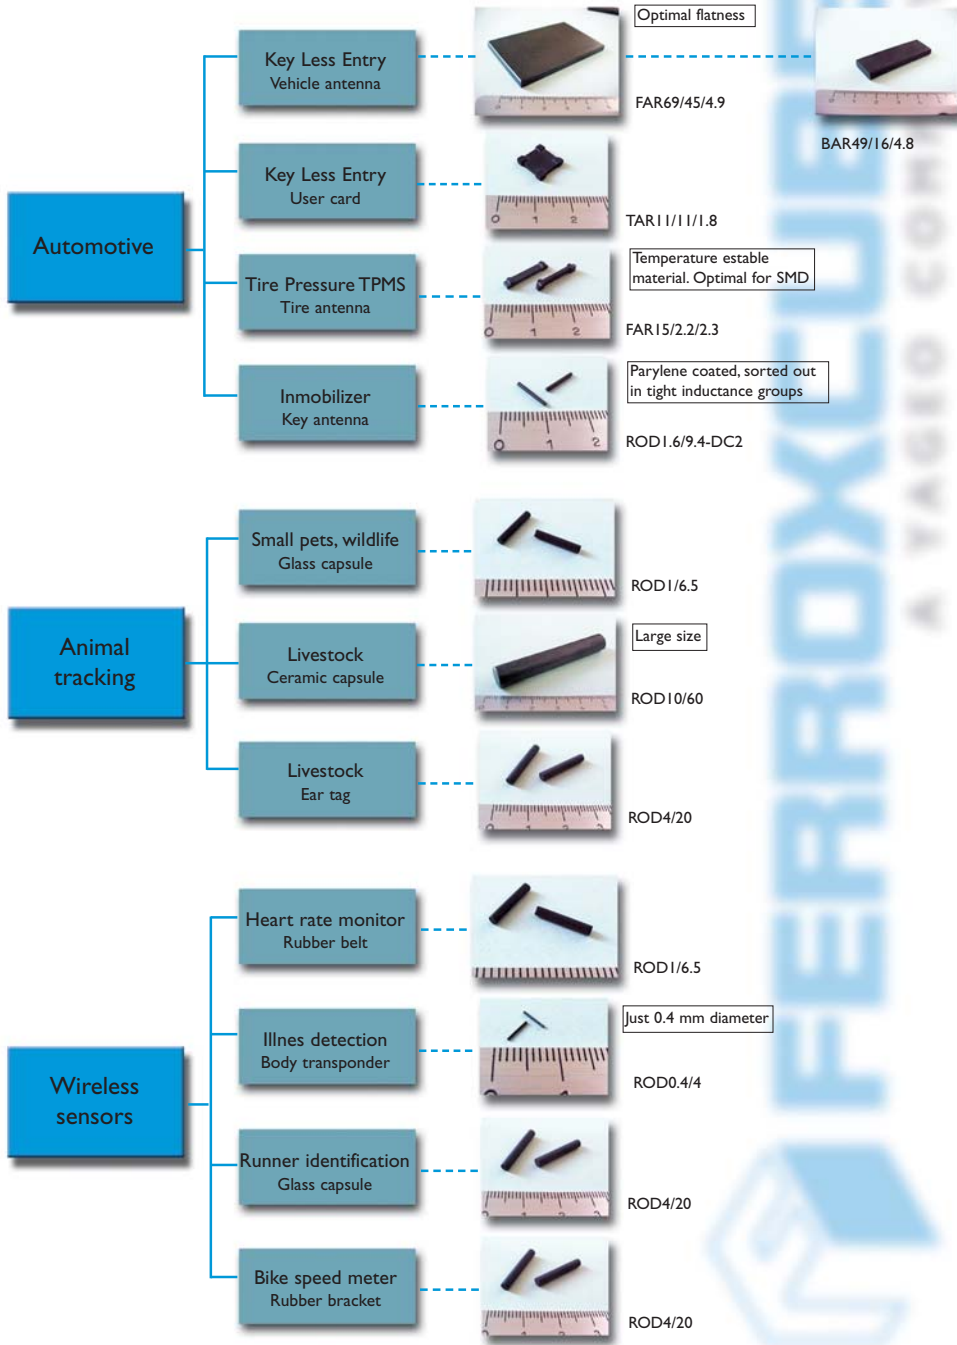

MnZn materials for high Q applications

		3C90	3B7
μ	25 °C; ≤ 10 kHz; 1mT	2300 \pm 20%	2300 \pm 20%
α	(K ⁻¹) 20 to 70 °C; ≤ 10 kHz; 1mT	$\approx 5 \times 10^{-6}$	$< (0 \pm 0.6) \times 10^{-6}$
tg δ/μ	25 °C; 500 kHz; 1mT	$< 100 \times 10^{-6}$	$< 100 \times 10^{-6}$
T _c (°C)		>220	>220

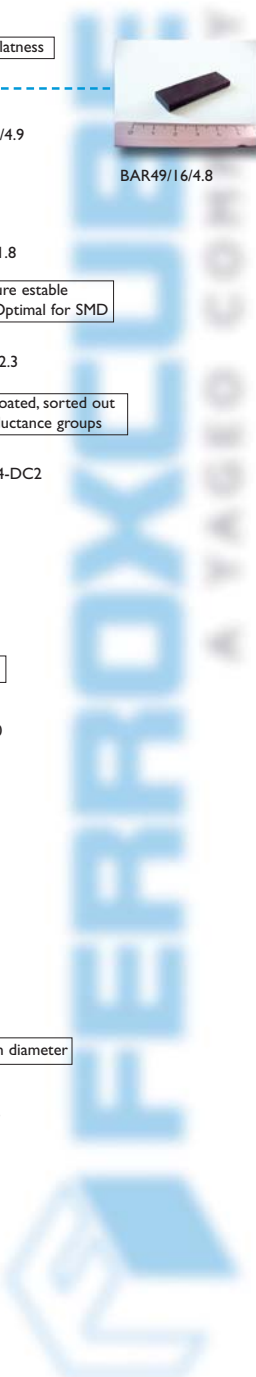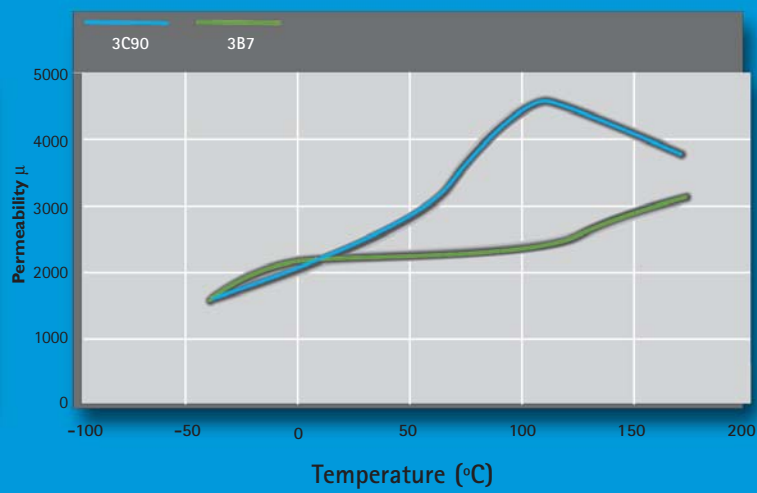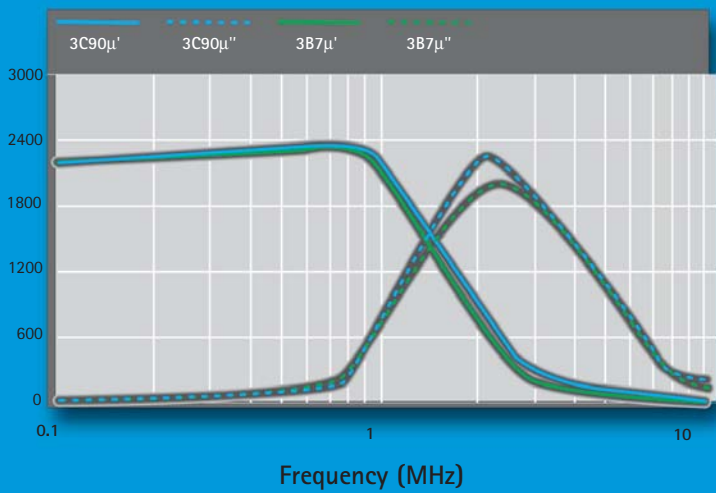

FERROXCUBE - your global partner

Australia: Contact Ferroxcube Taiwan
Tel: +886 2 86650099, Fax: +886 2 86650145

Austria: Contact Ferroxcube Germany
Tel: +49 (040) 527 28 305, Fax: +49 (040) 527 28 306

Benelux: Ferroxcube Netherlands, EINDHOVEN
Tel: +31 (0)40 27 24 216, Fax: +31 (0)40 27 24 411

Canada: Contact Ferroxcube USA
Tel: +1 915 599 2513/2328, Fax: +1 915 599 2555

China: Ferroxcube Hong Kong, SHANGHAI
Tel: +86 21 6380 0607 / 3121, Fax: +86 21 6380 0910

Czech Republic: Contact Ferroxcube Poland
Tel: +48 46 834 00 07, Fax: +48 46 834 00 35

Denmark: Contact Ferroxcube Sweden
Tel: +46 8 580 119 76, Fax: +46 8 580 121 60

Finland: Contact Ferroxcube Sweden
Tel: +46 8 580 119 76, Fax: +46 8 580 121 60

France: Ferroxcube France, NANTERRE
Tel: +33 (01) 5551 8422, Fax: +33 (01) 5551 8423

Germany: Ferroxcube Germany, HAMBURG
Tel: +49 (040) 527 28 302, Fax: +49 (040) 527 28 306

Greece: Contact Ferroxcube Italy
Tel: +39 02 241131 1, Fax: +39 02 241131 11

Hungary: Contact Ferroxcube Poland
Tel: +48 46 834 00 07, Fax: +48 46 834 00 35

Hong Kong: Ferroxcube Hong Kong, HONG KONG
Tel: +852 2319 2740, Fax: +852 2319 2757

Indonesia: Contact Ferroxcube Singapore
Tel: +65 6244 7815, Fax: +65 6449 0446

Ireland: Contact Ferroxcube UK
Tel: +44 870 2418759, Fax: +44 870 2418761

Israel: ArrowRapac Ltd., PETACH TIKVA
Tel: +972 3 9203480, Fax: +972 3 9203443

Italy: Ferroxcube Italy, SESTO S. GIOVANNI (MI)
Tel: +39 02 241131 1, Fax: +39 02 241131 11

Malaysia: Contact Ferroxcube Singapore
Tel: +65 6244 7815, Fax: +65 6449 0446

Mexico: Contact Ferroxcube USA
Tel: +1 915 599 2513/2328, Fax: +1 915 599 2555

New Zealand: Contact Ferroxcube Taiwan
Tel: +886 2 86650099, Fax: +886 2 86650145

Norway: Contact Ferroxcube Sweden
Tel: +46 8 580 119 76, Fax: +46 8 580 121 60

Philippines: Contact Ferroxcube Singapore
Tel: +65 6244 7815, Fax: +65 6449 0446

Poland: Ferroxcube Polska, SKIERNIEWICE
Tel: +48 46 834 00 07, Fax: +48 46 834 00 35

Portugal: Contact Hispano Ferritas, Spain
Tel: +34 949 247153, Fax: +34 949 247 146

Singapore: Ferroxcube Singapore, SINGAPORE
Tel: +65 6244 7815, Fax: +65 6449 0446

Spain: Hispano Ferritas, GUADALAJARA
Tel: +34 949 247 153, Fax: +34 949 247 146

Sweden: Ferroxcube Sweden, JÄRFÄLLA
Tel: +46 8 580 119 76, Fax: +46 8 580 121 60

Switzerland: Contact Ferroxcube Germany
Tel: +49 (040) 527 28 305, Fax: +49 (040) 527 28 306

Taiwan: Ferroxcube Taiwan, TAIPEI
Tel: +886 2 86650099, Fax: +886 2 86650145

Turkey: Contact Ferroxcube Italy
Tel: +39 02 241131 1, Fax: +39 02 241131 11

United Kingdom: Ferroxcube UK, LEATHERHEAD
Tel: +44 870 2418759, Fax: +44 870 2418761

United States: Ferroxcube USA, EL PASO (TX)
Tel: +1 915 599 2513/2328, Fax: +1 915 599 2555

For all other countries apply to closest regional sales office:

- HAMBURG, Germany
Tel: +49 (040) 527 28 302, Fax: +49 (040) 527 28 306
e-mail: saleseurope@ferroxcube.com
- EL PASO (TX), USA
Tel: +1 915 599 2513/2328, Fax: +1 915 599 2555
e-mail: salesusa@ferroxcube.com
- TAIPEI, Taiwan
Tel: +886 2 86650099, Fax: +886 2 86650145
e-mail: salesasia@ferroxcube.com

© Ferroxcube International Holding B.V. 2004

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.
The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Visit our web-site for the latest information on new products, application info as well as updated phone- and fax numbers

Internet: www.ferroxcube.com

Printed in Spain



FERROXCUBE

A YAGEO COMPANY