


PROPOSED PAD ARRANGEMENT :

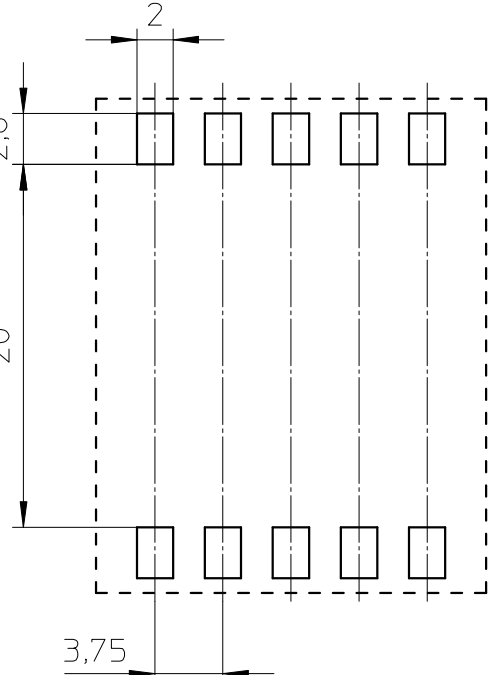

Coil former material: Vectra C130 (LCP), glass-reinforced.
 UL file number: E83005(M) - UL94V-0.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s
 Min. winding area: 27.7 mm².
 Mean length of turn: 34.1 mm.

CLASS.NO.	CPHS-EFD20/7-1S-10P		4322 021 00071		92-11-05
96-05-20					93-04-15
					96-05-20
					97-08-29
					06-06-28
NAME NAAM MPA	A.Wojtasz	SUPERS. VERY. CHECK CONTR.	001	SH SH BL BL 112 - 001	069
DAT.	92-03-27	Property of Eigendom van	© FERROXCUBE 2000		A3