



FERROXCUBE



c



d



e

f



1

2

3

4



5

6



7

8

mark pin 1

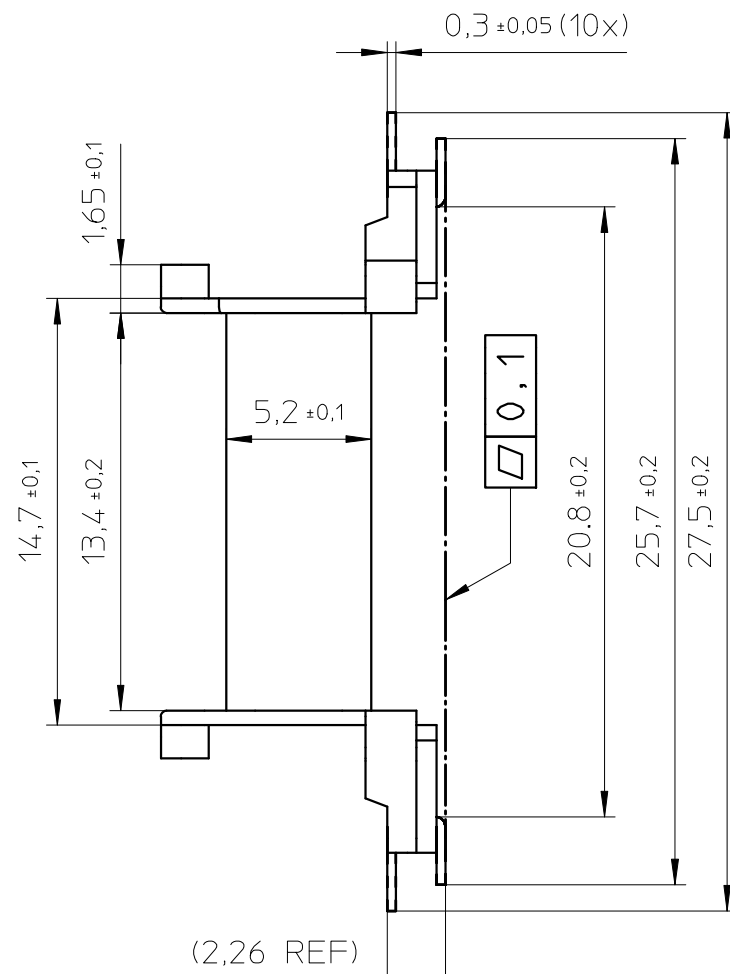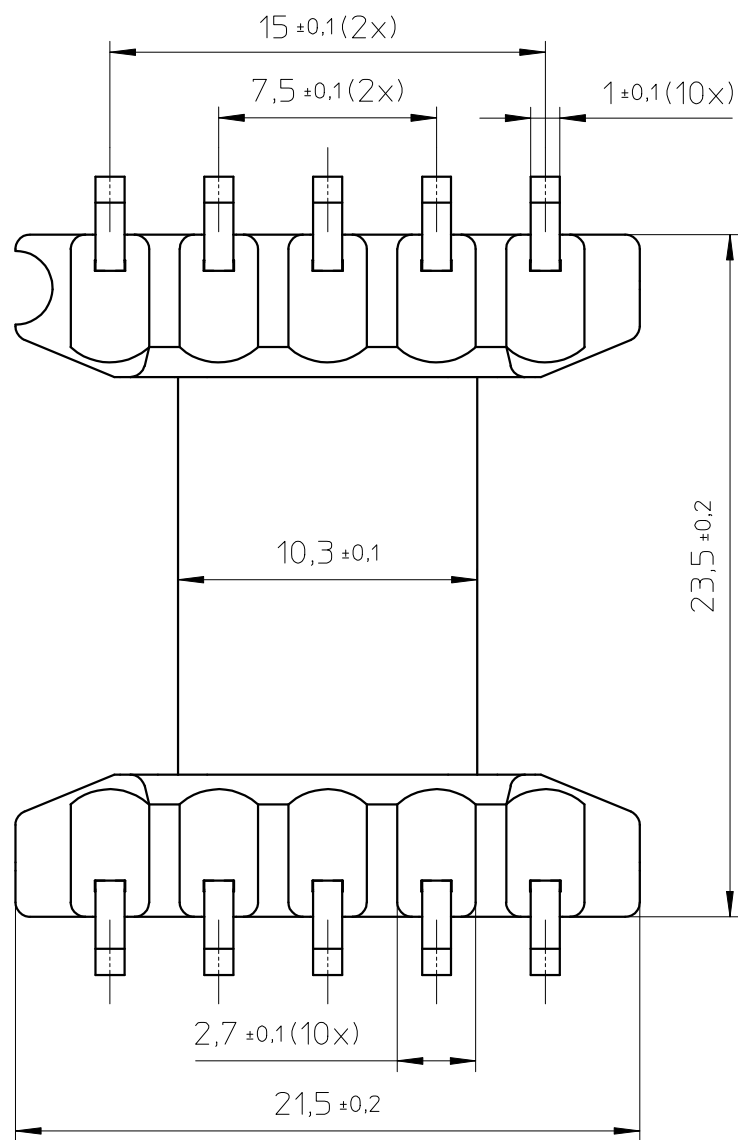

PROPOSED PAD ARRANGEMENT:

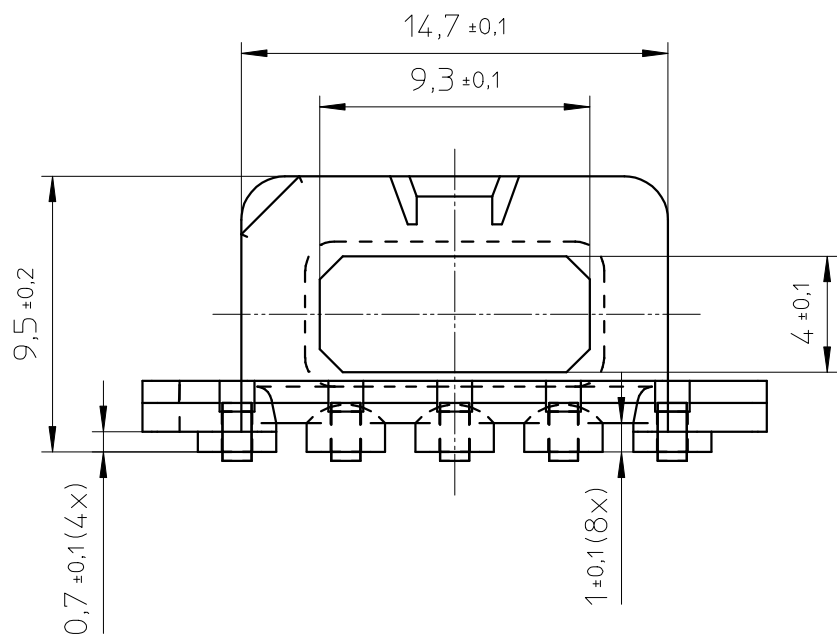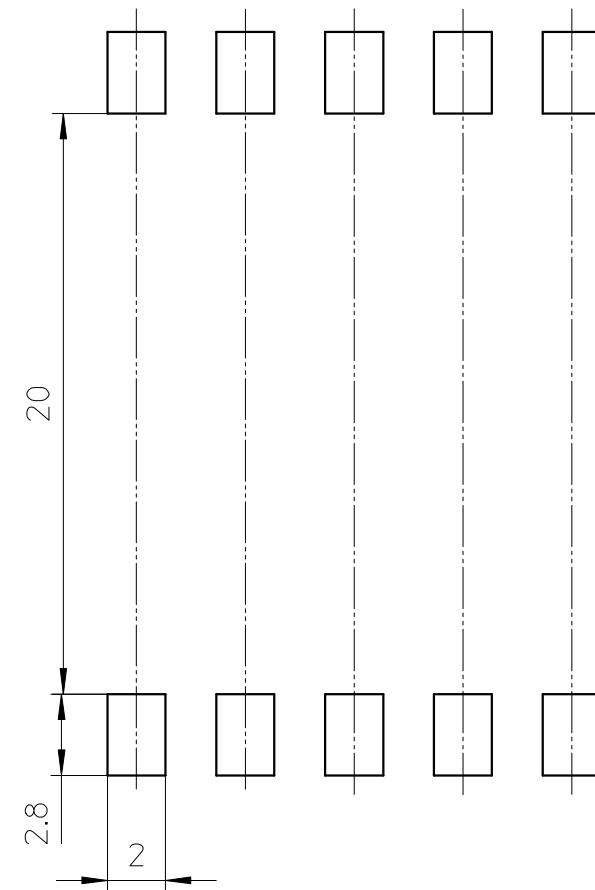

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
 UL file number E41429 - UL94V-0.

Pin material: Phosphor bronze, Sn plated.


Max. operating temp.: acc. to IEC 60 085 class H, 180°C

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s

Min. winding area: 27,1 mm²

Mean length of turn: 34,5 mm.



| | | | | |
|-------------------|--------------------|-----------------------------|-----------------------------------|------------|
| CLASS.NO. | CSHS-EFD20-1S-10PL | | 4322 021 02311 | 1997-06-02 |
| 98-07-08 | | | | 1998-07-08 |
| | | | | 2000-09-21 |
| | | | | 2005-03-11 |
| NAME NAAM | J. JON | SUPERS. VERV. | 8222 294 45961 001 SH SH BL BL | 112 - 001 |
| MPA | CHECK CONTR. | DAT. | 97-04-02 | 069 |
| | | Property of Eigendom van | | A3 |
| © FERROXCUBE 2000 | | | | |