


**FERROXCUBE**

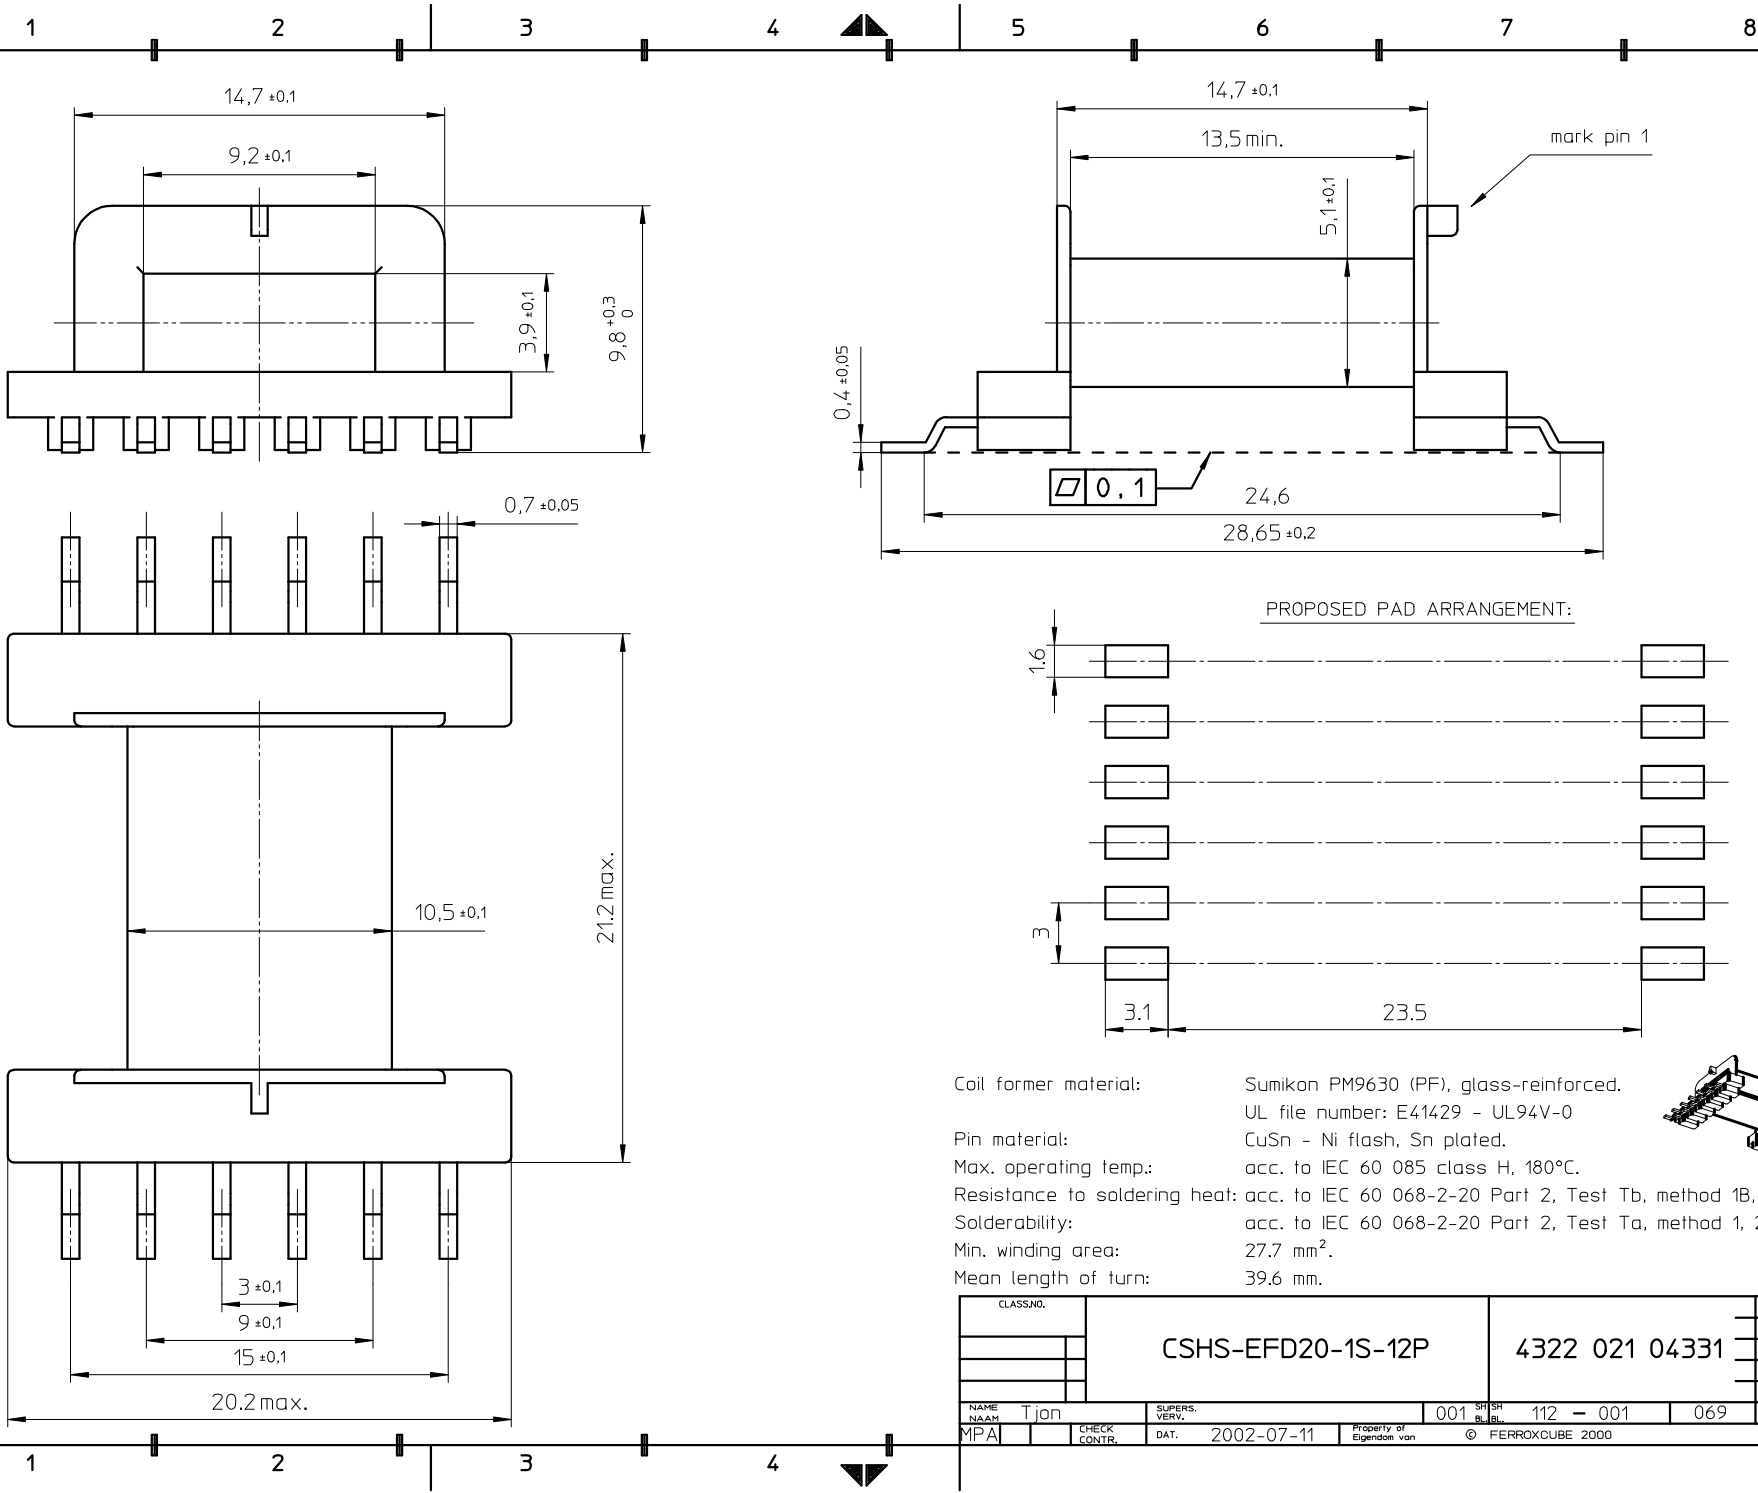

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s  
 Min. winding area: 27.7 mm<sup>2</sup>.  
 Mean length of turn: 39.6 mm.

CLASSNO.	CSHS-EFD20-1S-12P		4322 021 04331	2002-07-11
NAME	Tjon	SUPERS. VERV.	001	112 - 001
MPA	CHECK CONTR.	DAT.	2002-07-11	069
Property of Eigendom van			© FERROXCUBE 2000	
				A3