



PROPOSED HOLE PATTERN:

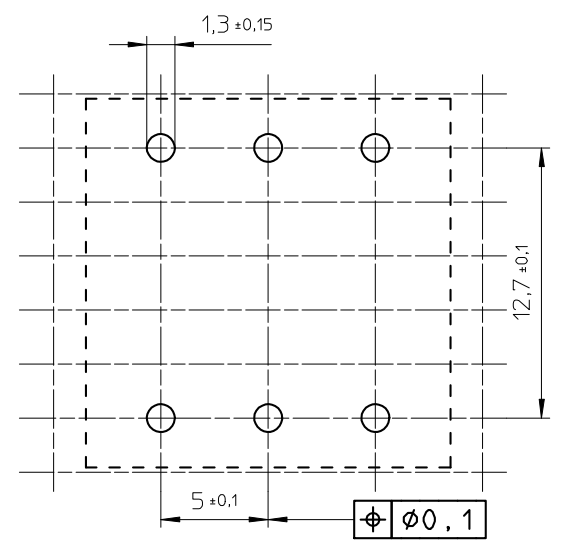

Coil former material: Longlite PM T375J (PF), glass-reinforced.
 UL file number: E59481 - UL94V-0.
 Pin material: CP wire - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 56 mm²
 Mean length of turn: 49 mm.



CLASSNO.		NAME		SUPERVISOR		DATE		PROPERTY		REVISION	
		M. Trynqiel				01-05-2003		FERROXCUBE 2008		01-05-2003	
										11-03-2005	
										10-06-2008	
										A3	

CSV-E25/13/7-1S-6P-C

4322 021 04461

01-05-2003
11-03-2005
10-06-2008

MPA CHECK CONTR. DAT. 01-05-2003 Property of Eigenaam van 001 SP/SH RL/BL 112 - 001