

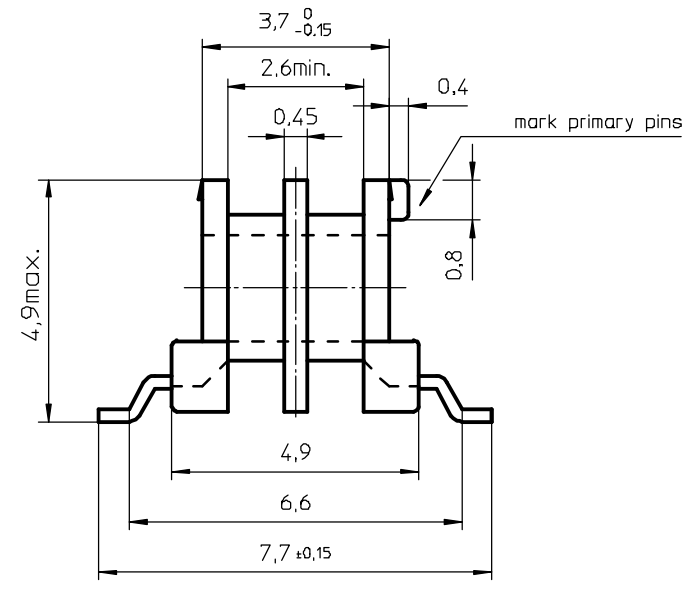


1 2 3 4 5 6 7 8

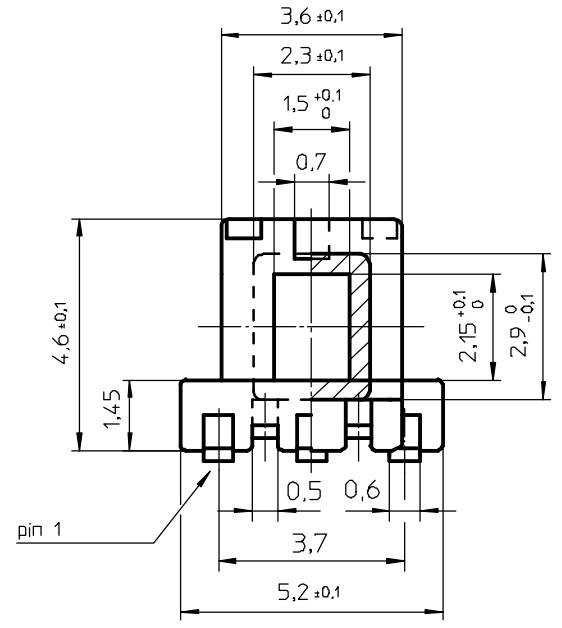

PROPOSED PAD ARRANGEMENT

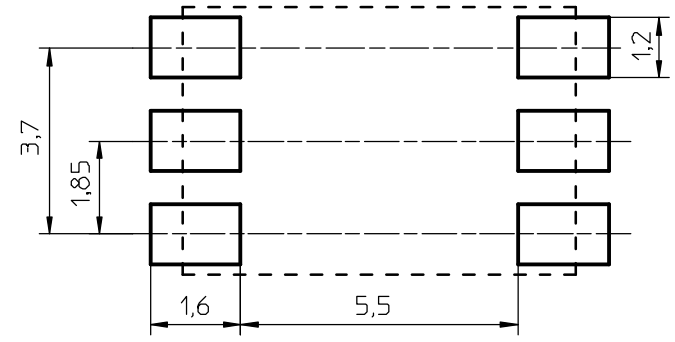

- Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
- UL file number: E54705 - UL94V-0
- Pin material: CuSn - Ni flash, Sn plated.
- Max. operating temp.: acc. to IEC 60085 class F, 155°C.
- Resistance to soldering heat-acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
- Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
- Min. winding area: 1,5 mm².
- Mean length of turn: 12,6 mm.

CLASS NO.		CPHS-E5,3/2-2S-6P-Z		4322 021 06021		03-02-20	
NAME	M.Veekens	SUPERS		1	112 - 001	069	A3
MPA	CHECK	DATE	03-02-20	Property of	© FERROXCUBE 2000		

1 2 3 4