



1

2

3



4

5


6

7

8

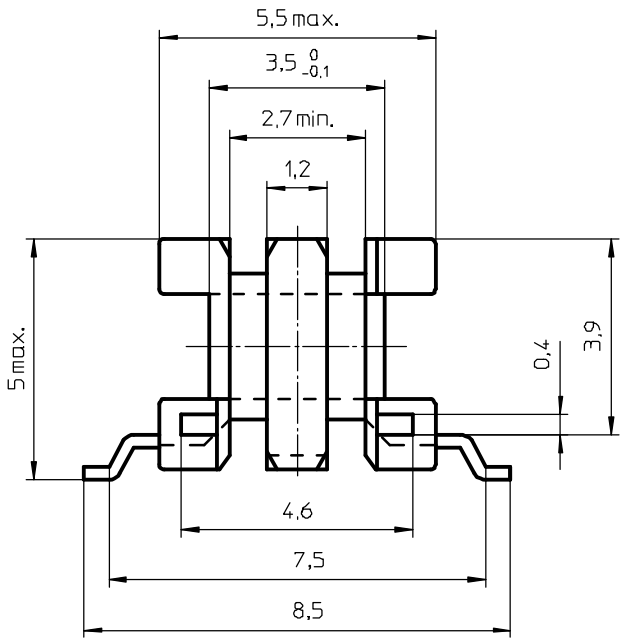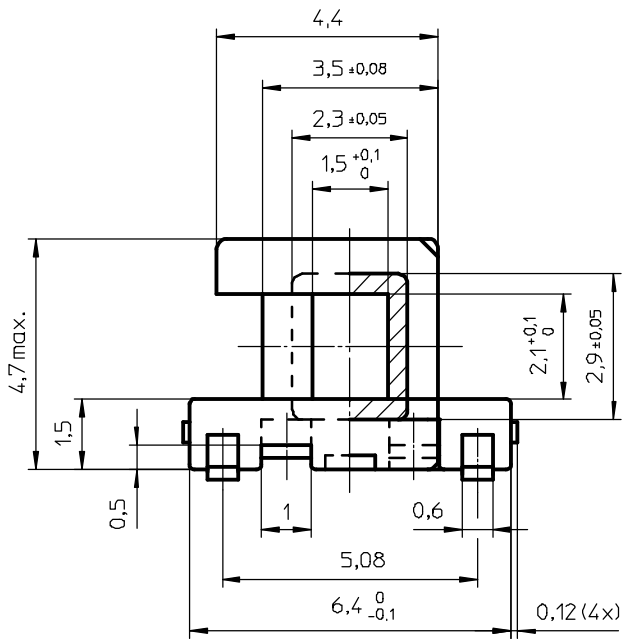

PROPOSED PAD ARRANGEMENT

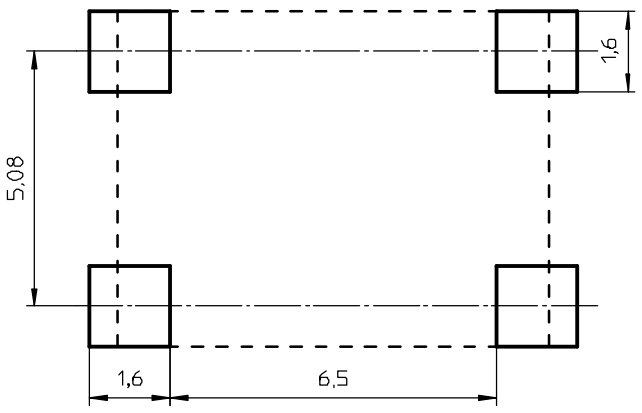

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
 UL file number: E54705 - UL94V-0
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
 Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 0,9 mm².
 Mean length of turn: 12,8 mm.

CLASSNO				03-02-20	
CPHS-E6,3/2-2S-4P-Z		4322 021 06051			
NAME NAAM	M Veekens	SUPERS. VERV.		1 SH BL.	SH 112 - 001
MPA	CHECK CONTR	DATE	03-02-20	Property of Eggen van	© FERROXCUBE 2000
					A3

1

2

3

4