


**HOLE PATTERN:**

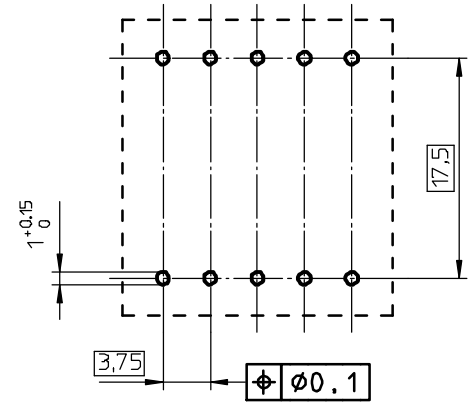

Coil former material: Sumikasuper (LCP), glass-reinforced.  
 UL file number: E54705 - UL94V-0.  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60085 class F, 155°C.  
 Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec  
 Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area: 27,7 mm<sup>2</sup>.  
 Mean length of turn: 34,1 mm.

CLASS NO.		CPH-EFD20-1S-10PD-Z		4322 021 06161		03-02-25	
NAME	M. Veekens	SUPERS	112	001	SP	112	001
NO. IN	MPA	CHECK	CONTR.	DATE	03-02-25	PROPERTY OF	Eigendoms van
						© FERROXCUBE 2000	