



**FERROXCUBE**

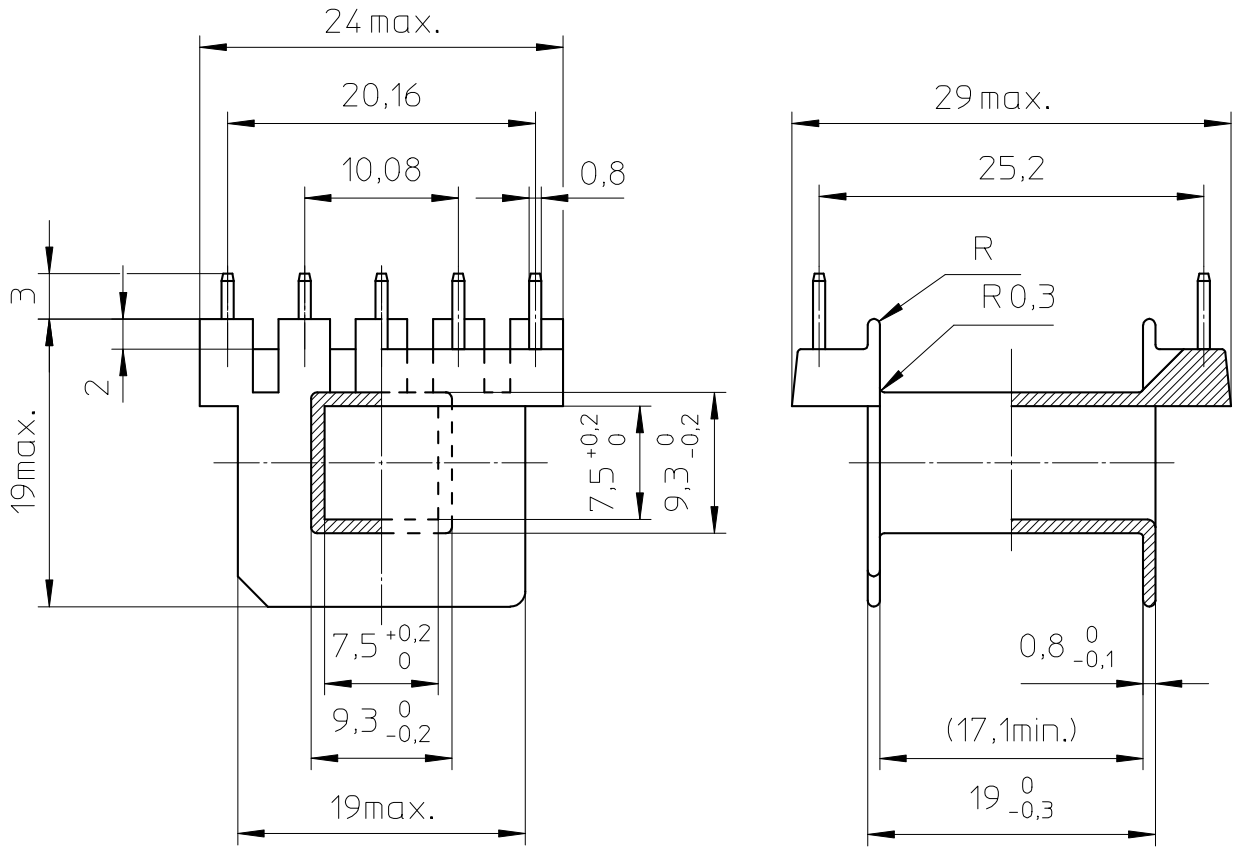

HOLE PATTERN :

Space requirement 5x6 pitch

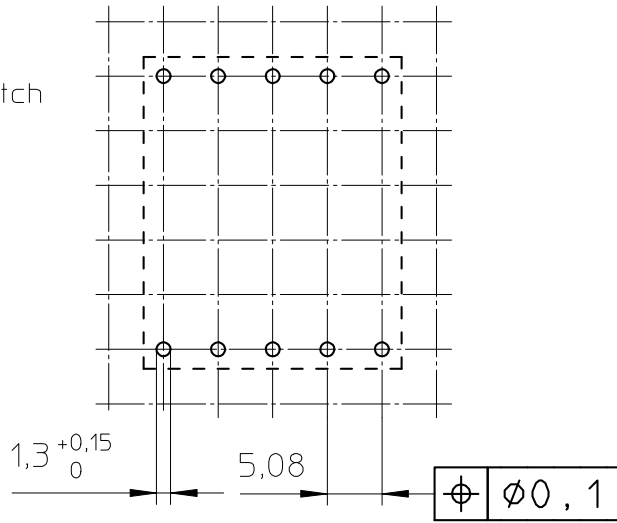

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resist. to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.  
 Min. winding area: 80 mm<sup>2</sup>.  
 Mean length of turn: 56 mm.

CLASSNO.			07-10-22
	CSH-E30/15/7-1S-10P-IZ	4322 021 06841	
07-10-22			
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1 SH BL. 112 - 001 010
MPA	CHECK CONTR.	DAT. 07-10-22	Property of Eigendom van © FERROXCUBE 2007
			A4