
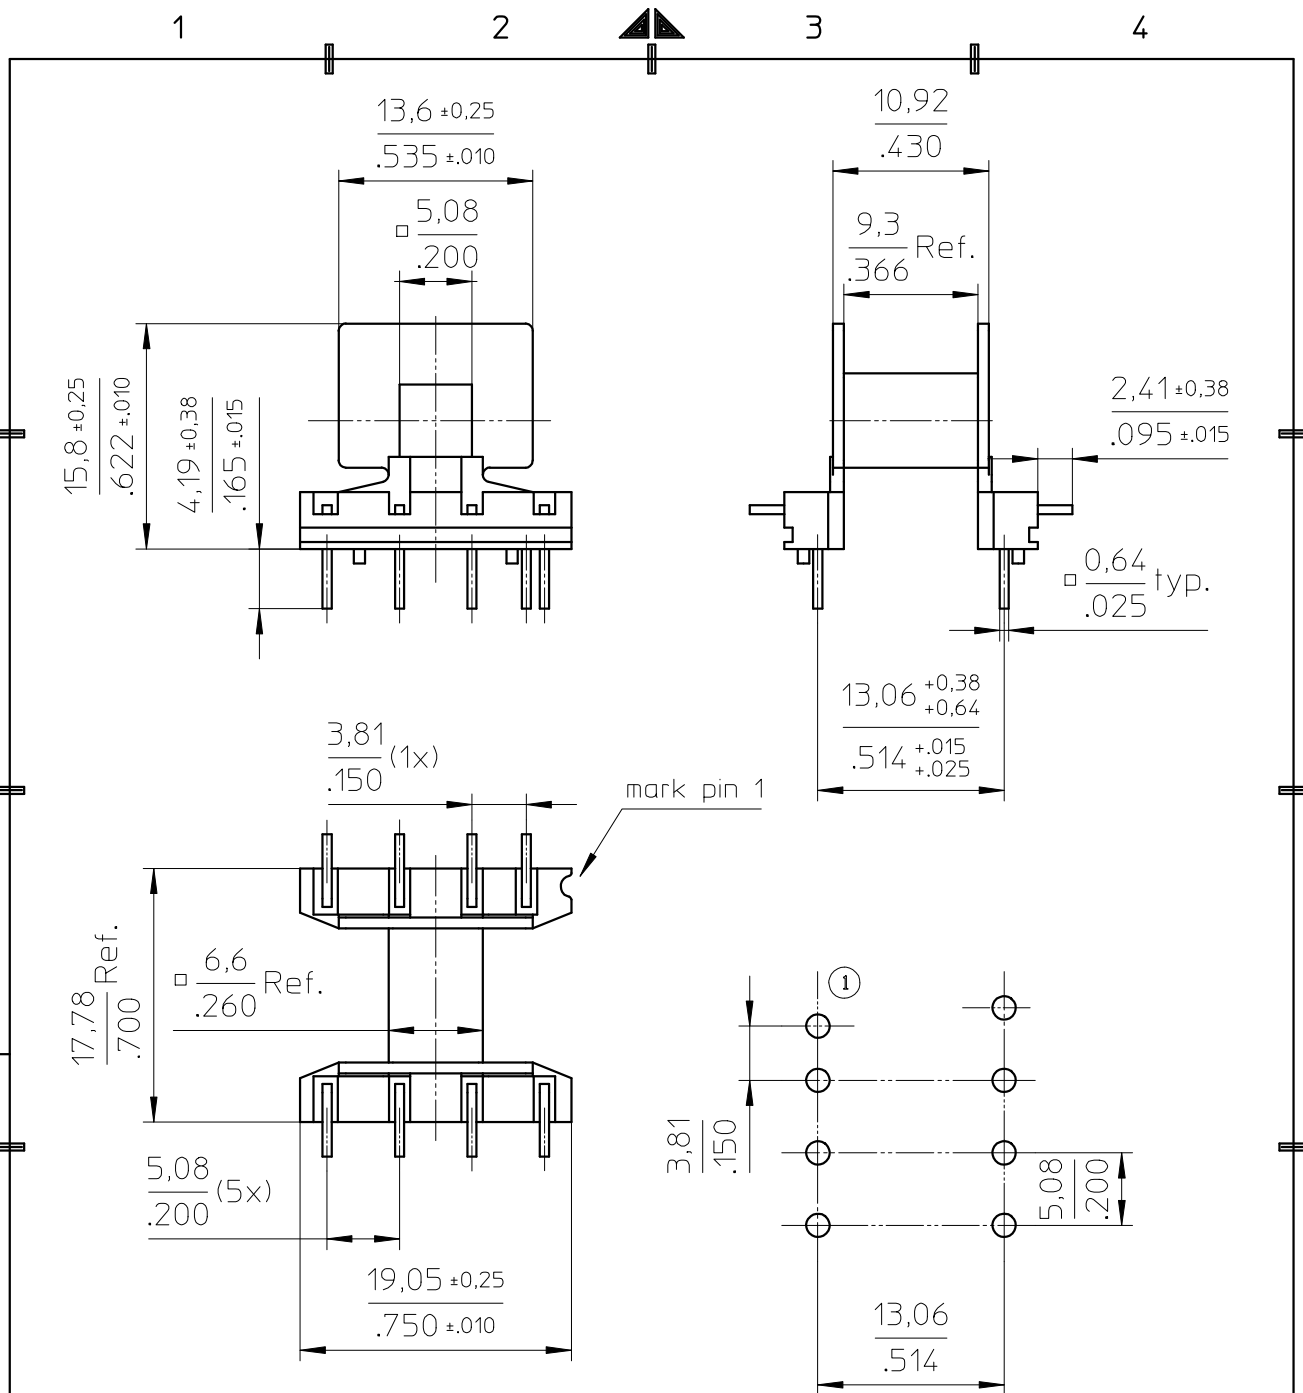



FERROXCUBE



Coil former material: Zytel 70G33L (PA66), glass-reinforced.
 UL file number: E41938 - UL94HB.
 max. operating temp: 130°C, class B
 pin material: Brass or CuSn, Sn plated.
 solderability: acc. to IEC 60068-2-20 part2, Test Ta method 1, 235C-2sec. (MIL-STD 202, method 208).
 mean length of turn: 1.610 inch
 winding area: 0.050 sq. inch.

CLASS.NO.		CPH-E19/5-1S-8PD-Z		4335 060 27051		01-06-01			
						02-05-01			
						03-01-13			
						06-03-08			
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1	SH BL	112	-	001	010	A4
MPA	CHECK CONTR.	DAT.	Property of Eigendom van		© FERROXCUBE 2000				