
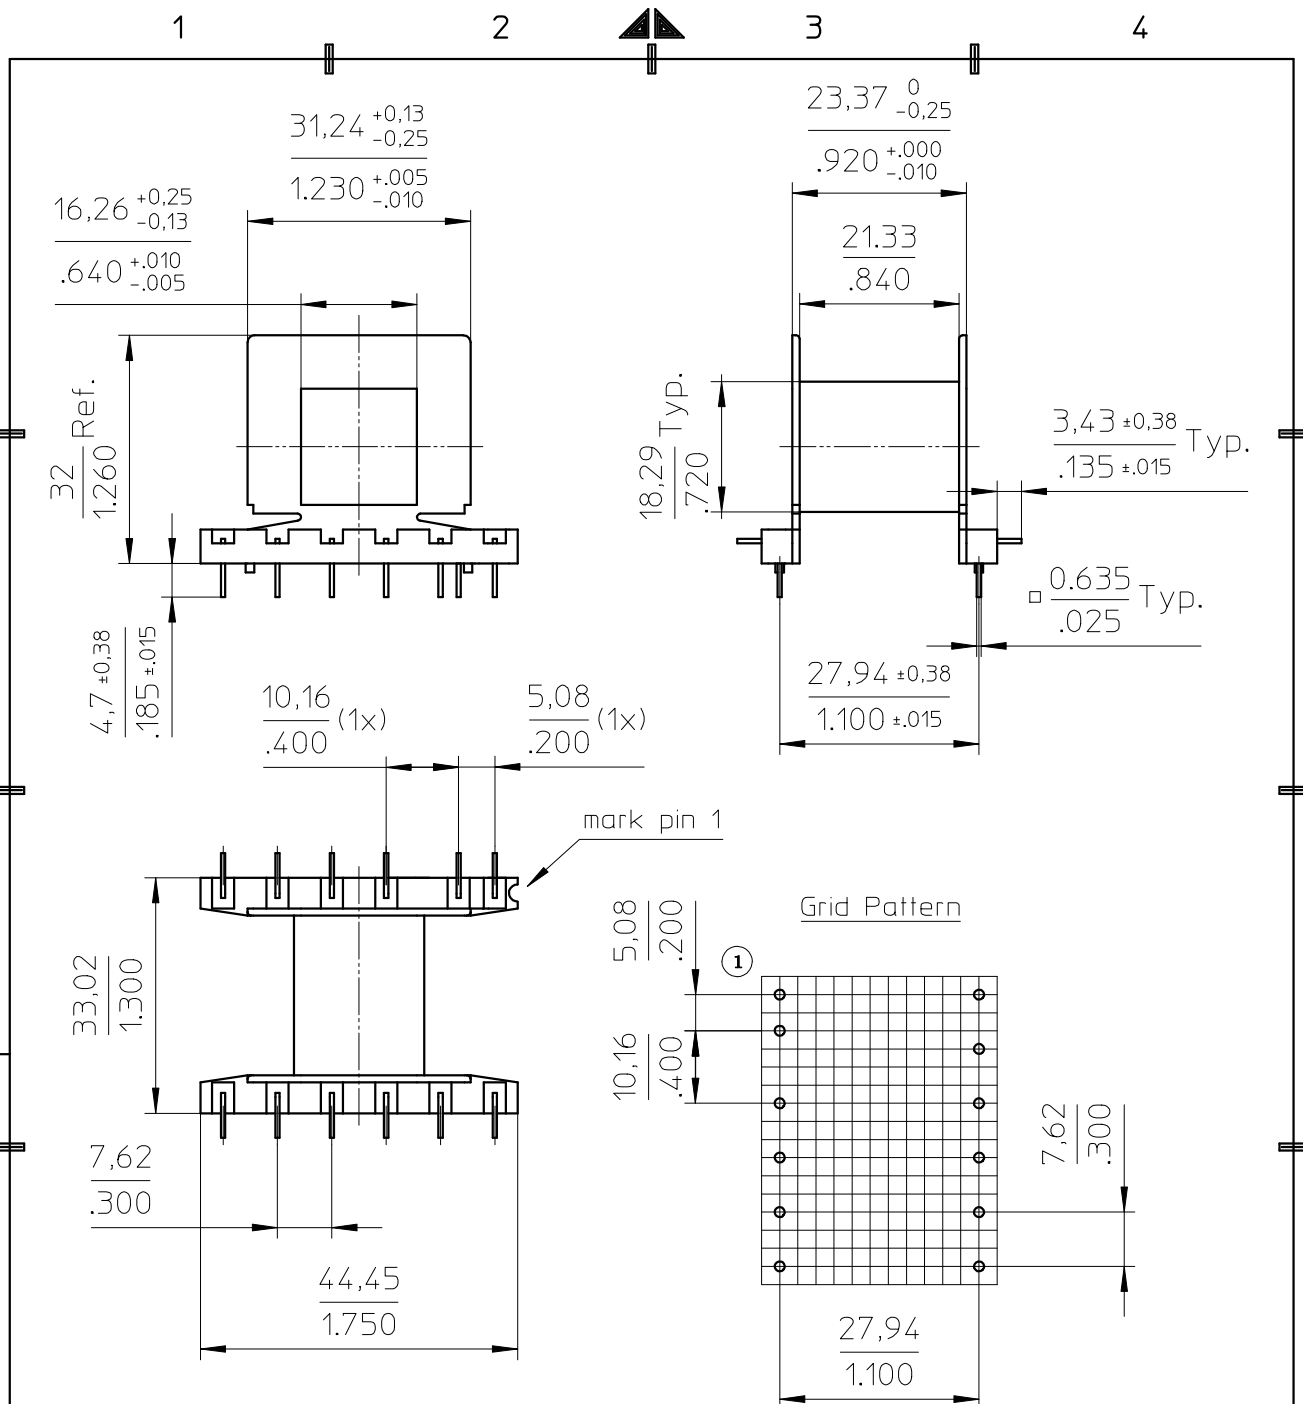



FERROXCUBE



Coil former material: Zytel 70G33L (PA66), glass-reinforced.
 UL file number: E41938 - UL94HB.
 max. operating temp: 130°C, class B
 pin material: CuSn, Sn plated.
 solderability: acc. to IEC 60068-2-20 part2, Test Ta method 1, 235C-2sec. (MIL-STD 202, method 208).
 mean length of turn: 3.74 inch (94.7 mm)
 winding area: 0.205 sq inch (131 sq mm)

CLASS.NO.		CPH-E47/16-1S-12PD-Z		4335 060 27131		01-06-01
						02-05-01
						03-01-13
						06-03-07
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1	SH BL	112 - 001	010
MPA	CHECK CONTR.	DAT.	Property of Eigendom van		© FERROXCUBE 2000	
						A4