
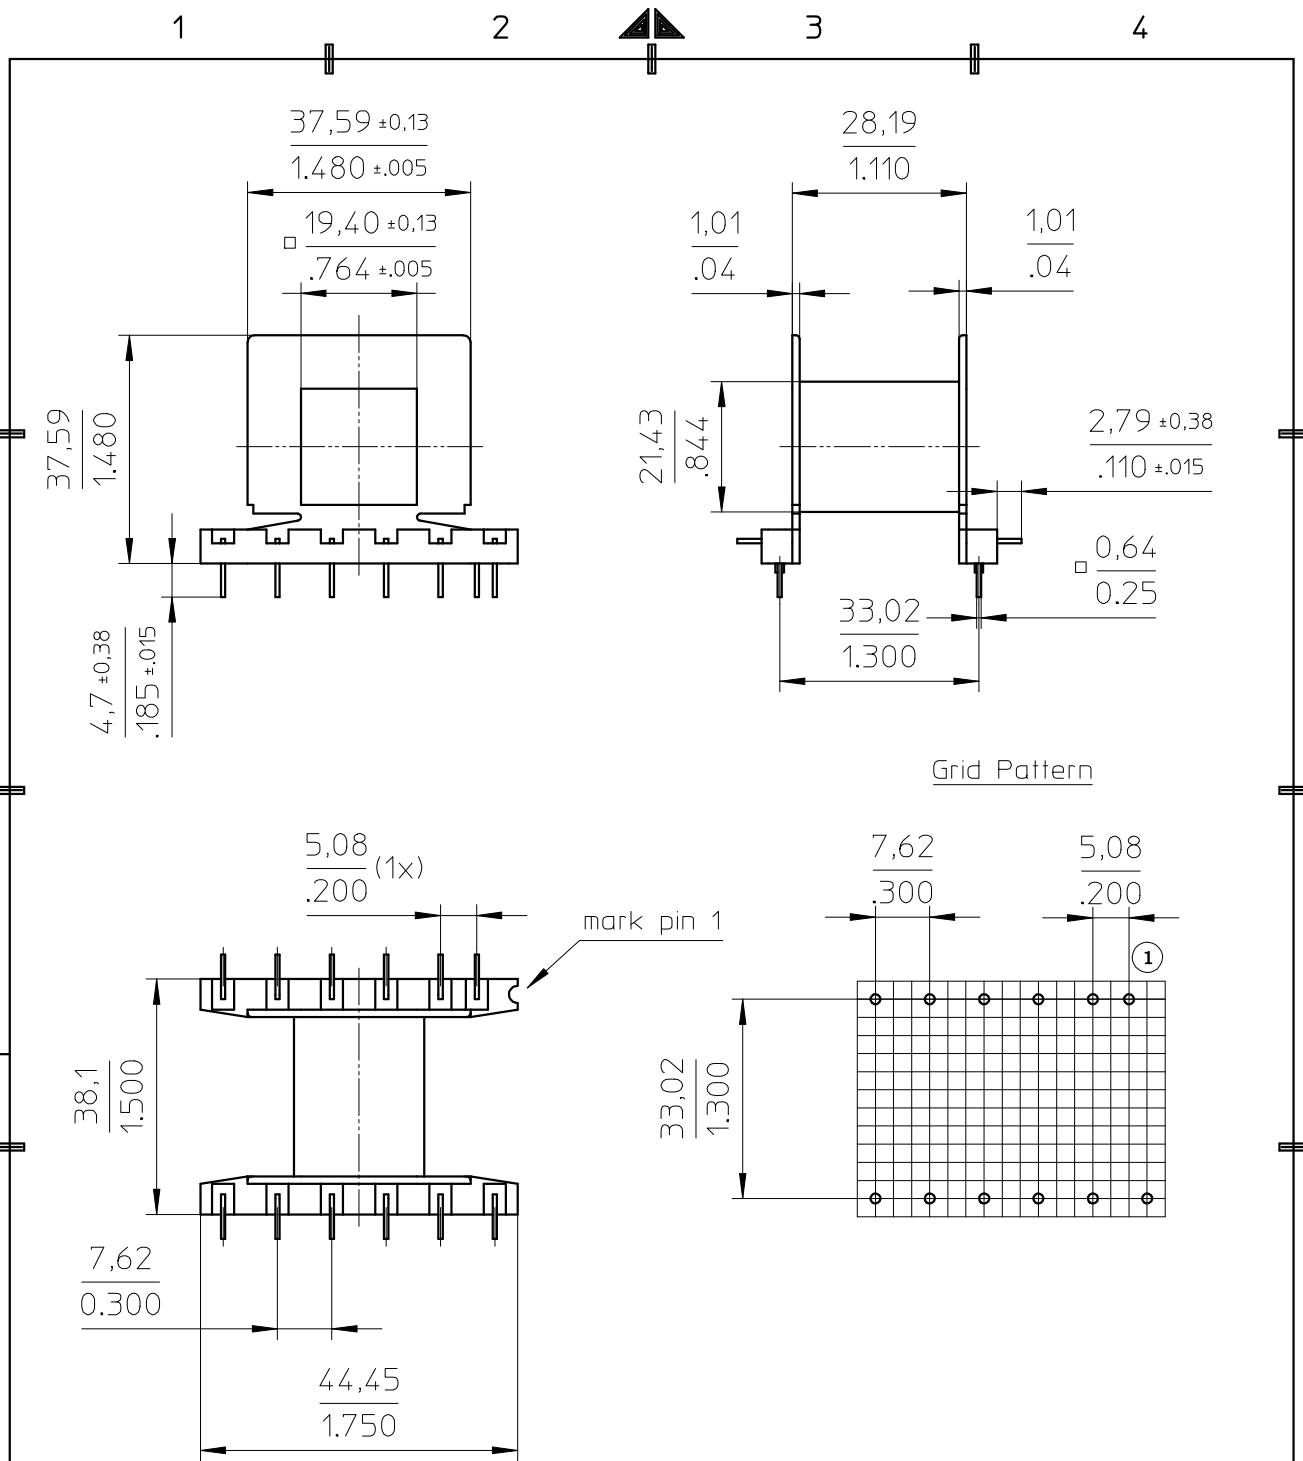



FERROXCUBE



Coil former material: Zytel 70G33L (PA66), glass-reinforced.
 UL file number: E41938 - UL94HB.
 max. operating temp: 130°C, class B
 pin material: CuSn, Sn plated.
 solderability: acc. to IEC 60068-2-20 part2, Test Ta method 1, 235C-2sec. (MIL-STD 202, method 208).
 mean length of turn: 4.4 inch (114 mm)
 winding area: 0.317 sq inch (205 sq mm)

PROJ. EUROP.	CPH-E56/24/19-1S-12PD-Z	4335 060 27151	06-03-07
			06-07-28
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1 SH BL.
MPA	CHECK CONTR.	DAT.	112 - 001 010
Property of Eigendom van		© FERROXCUBE 2000	
		A4	