



FERROXCUBE



1

2

3

4

a

b

c



d

a

b

c

d

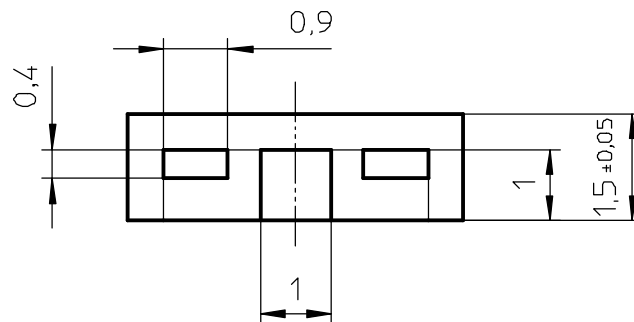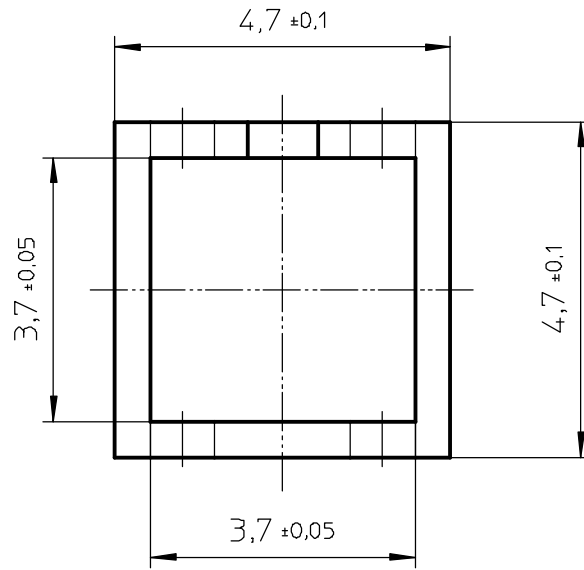

Cover material: Sumikasuper E4008 (LCP), glass-reinforced.
 UL file number: E54705(M) - UL94V-0
 Max. operating temp.: acc. to IEC 85 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.

CLASS NO.		COV-E5,3/2	4322 021 01991		97-03-17	
97-07-01					97-07-01	
NAME NAAM	J. Tjon	SUPERS. VERV.	8222 294 45831	1 SH BL	112 - 001 010	A4
MPA	CHECK CONTR.	DAT.	97-03-17	Property of Eigendom van	© FERROXCUBE 2000	