
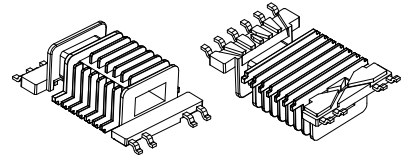
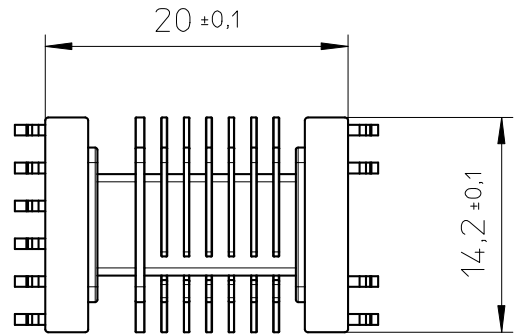
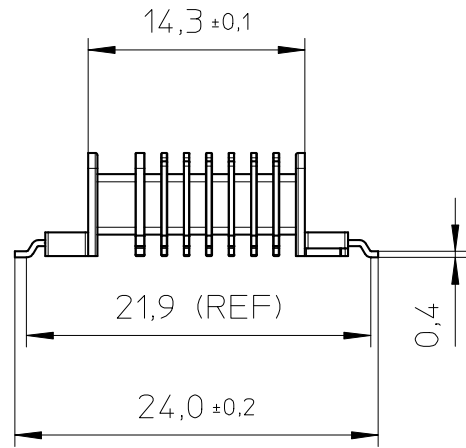
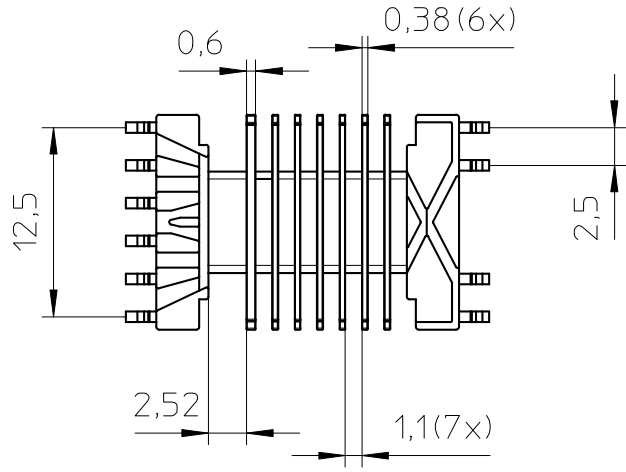


PROPOSED PAD ARRANGEMENT :

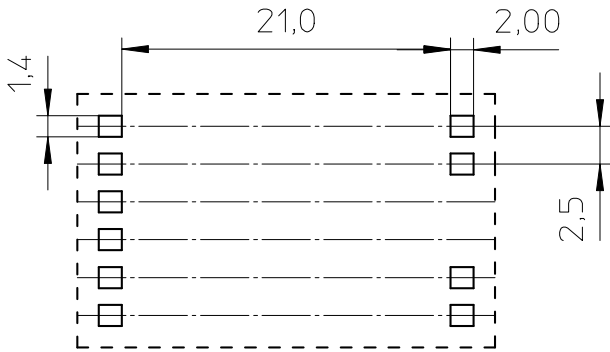

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
 UL file number: E54705 - UL94V-0.
 Pin material: Phosphor bronze, Sn plated (matte finish)
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
 Min. winding area: 3,5 + 7 x 1,5 mm²
 Mean length of turn: 27 mm.

CLASSNO.				07-06-19	
		CPHS-FRM20/15-8S-10P-C		4322 021 06711	
NAME NAAM	A.Wojtasz	SUPERS. VERV.	1	SH BL.	112 - 001 010
MPA	CHECK CONTR.	DAT.	07-06-19	Property of Eigendom van	© FERROXCUBE 2007
					A4