


Product Drawing and Specification

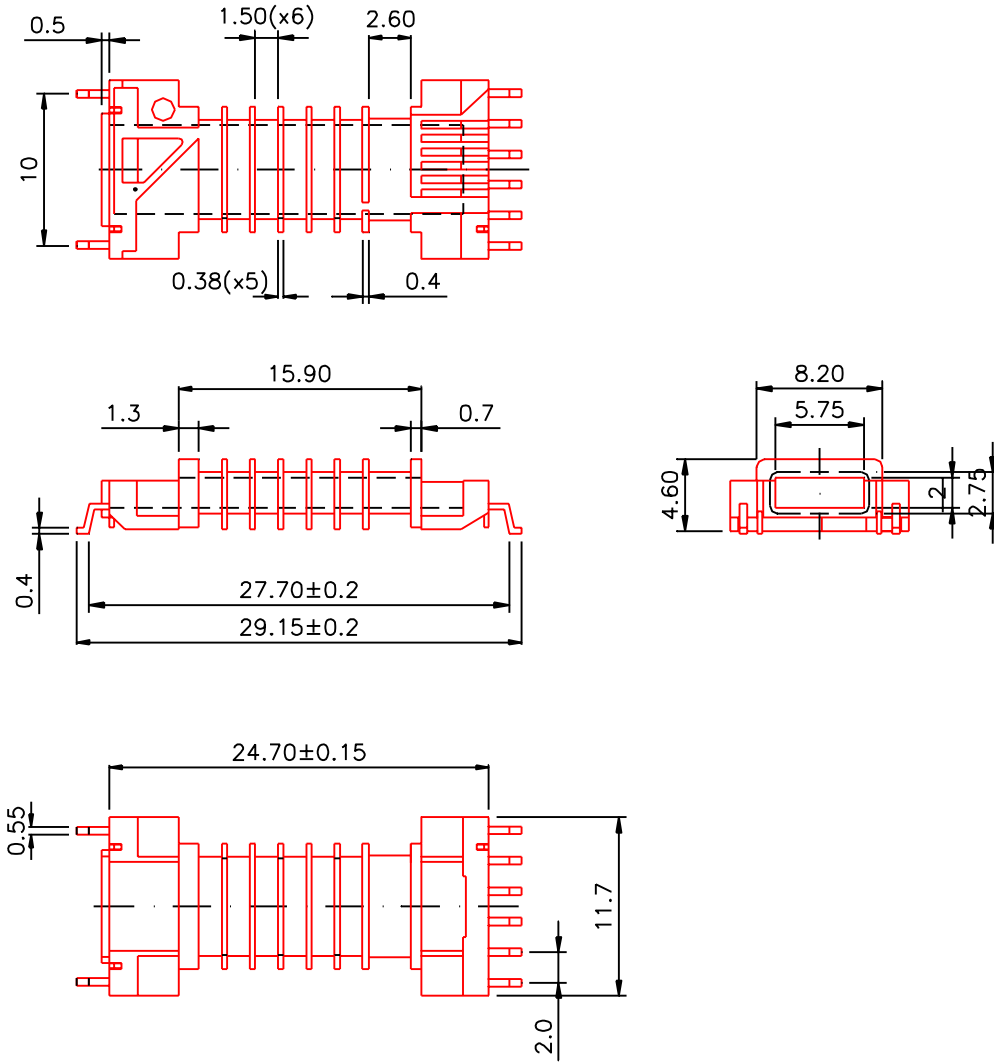

Coil former material	Liquid crystal polymer (LCP), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E54705(M)
Pin material	Copper-tin alloy (CuSn), tin (Sn) plated
Maximum operating temperature	155~6, "IEC 85" class F
Resistance to soldering heat	"IEC 68-2-20", Part 2, Test Tb, Method 1B: 350~6, 3.5s
Solderability	"IEC 68-2-20", Part 2, Test Ta, Method 1: 235~6, 2s

Coplanarity < 0.1mm

ROUGHNESS	UNIT	SCALE	PROJ EUROP	UN-D 28	TOLERANCES: ± 0.1 mm UNLESS OTHERWISE STATED	A	UN-D 603
	mm	2:1			DIMENSION: ACC: TO DIN 406 TEIL 4		

		CPHS-FRM21/12-7S-8P		4338 020 0706		-1	99-08-27
Name: T.M. Wu		Supers.		110 - 02		010	SH 1
TR	Dat. 99-07-28		Property of Ferroxcube E&U Cores factory- Taiwan				