


General data 6-pins P22/13 coil former for PCB mounting

| PARAMETER | SPECIFICATION |
|-------------------------------|--|
| Coil former material | polyamide (PA6.6), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E41938(M) |
| Maximum operating temperature | 130 C, "IEC 60085", class B |
| Pin material | copper-zinc alloy (CuZn), tin-lead alloy (SnPb) plated |
| Resistance to soldering heat | "IEC 60068-2-20", Part 2, Test Tb, method 1B, 350 C, 3.5 s |
| Solderability | "IEC 60068-2-20", Part 2, Test Ta, method 1, 235 C, 2 s |

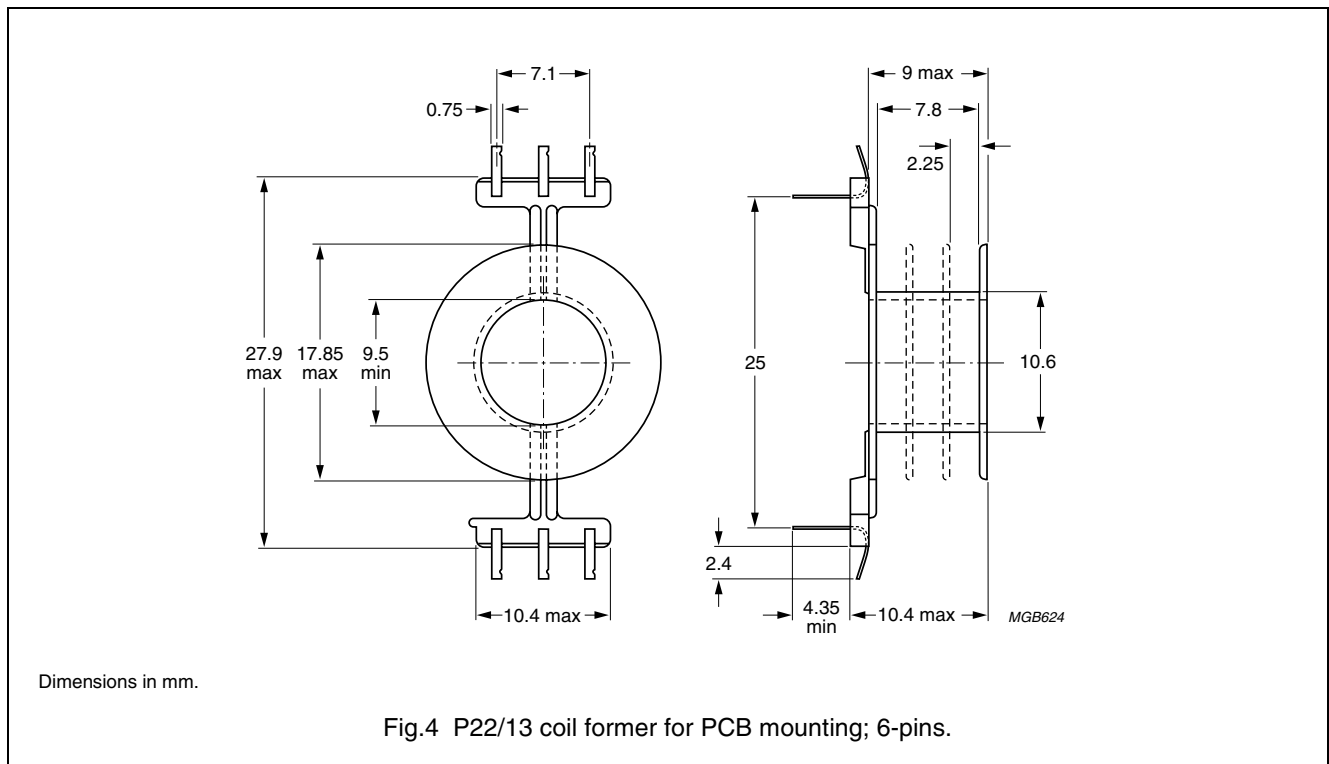

Data for 6-pins P22/13 coil former for PCB mounting

| NUMBER OF SECTIONS | MINIMUM WINDING AREA (mm ²) | NOMINAL WINDING WIDTH (mm) | AVERAGE LENGTH OF TURN (mm) | MINIMUM LENGTH OF PINS (mm) | TYPE NUMBER |
|--------------------|---|----------------------------|-----------------------------|-----------------------------|-----------------------------------|
| 1 | 25.2 | 7.8 | 44.5 | 4.4 | CPV-P22/13-1S-6PD |
| 1 | 25.2 | 7.8 | 44.5 | 6.8 | CPV-P22/13-1S-6PDL |
| 2 | 2 11.7 | 2 3.6 | 44.5 | 4.4 | CPV-P22/13-2S-6PD |
| 2 | 2 11.7 | 2 3.6 | 44.5 | 6.8 | CPV-P22/13-2S-6PDL |
| 3 | 3 7.03 | 3 2.2 | 44.5 | 4.4 | CPV-P22/13-3S-6PD ⁽¹⁾ |
| 3 | 3 7.03 | 3 2.2 | 44.5 | 6.8 | CPV-P22/13-3S-6PDL ⁽¹⁾ |

Note

1. In accordance with "UL 94-HB".