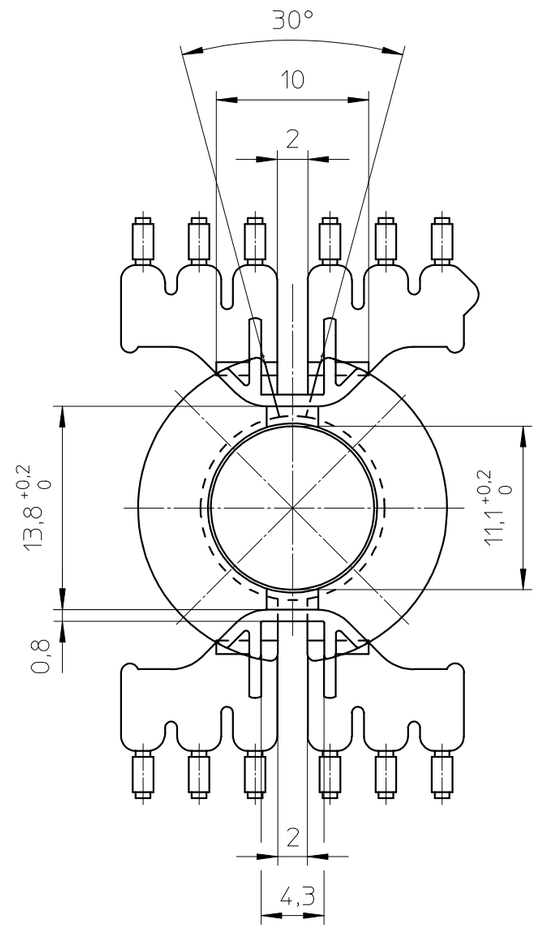

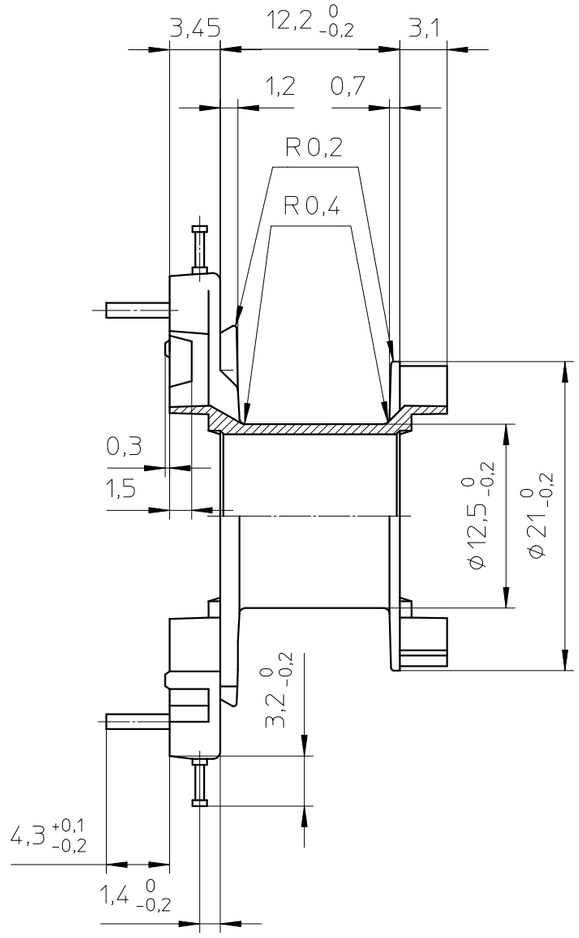

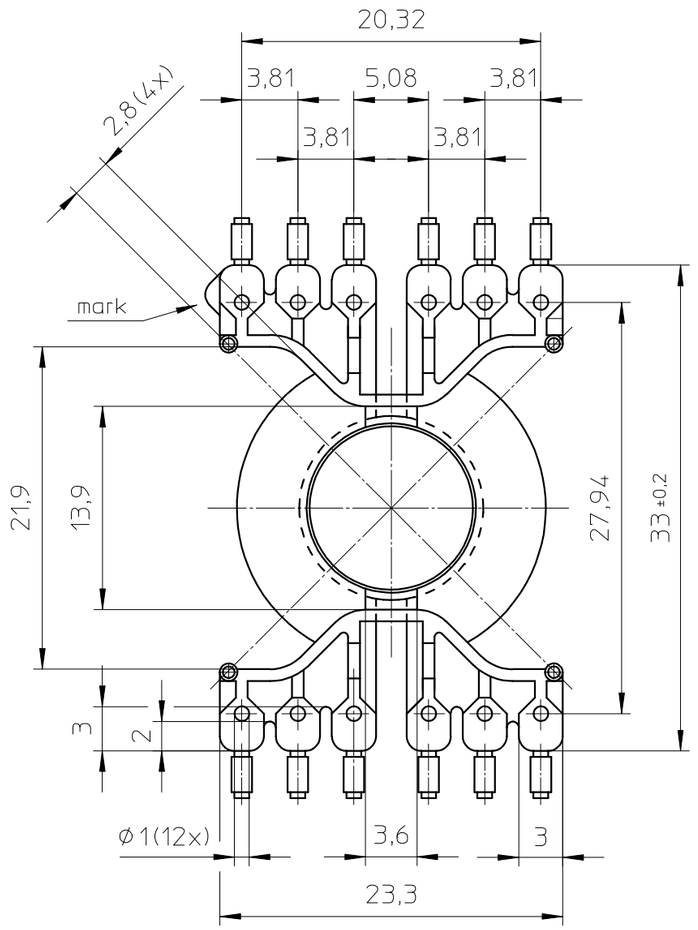

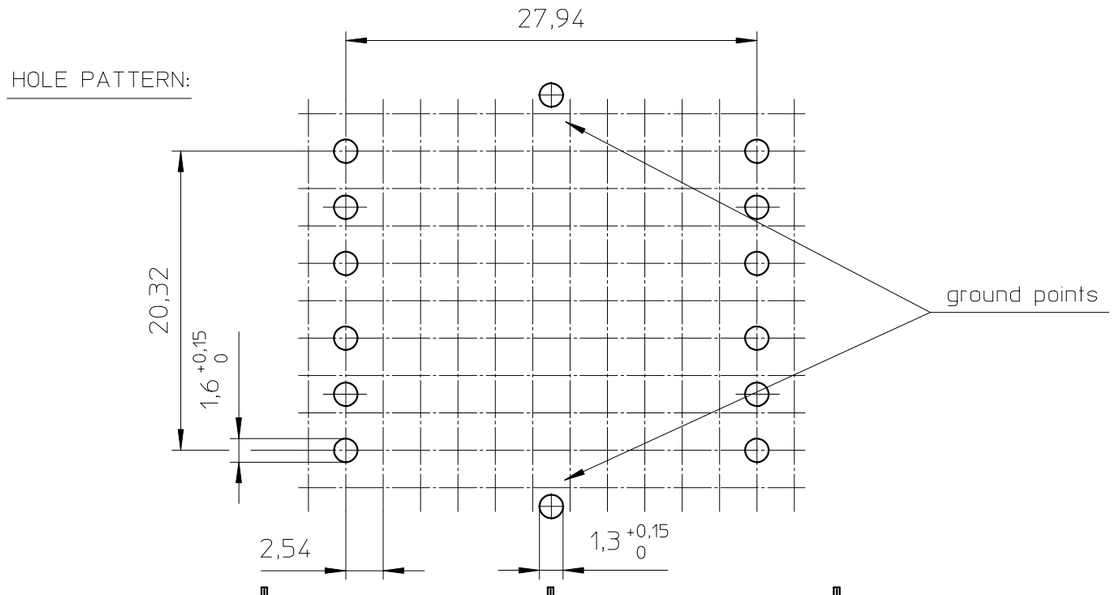

Coil former material:	Valox 420SE0 (PBT), glass-reinforced. UL file number: E45329(R) - UL94V-0.
Pin material:	CuSn - Ni flash, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class F, 155°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
Min. winding area:	44,2 mm^2.
Mean length of turn:	52 mm.

CLASS.NO.	CPV-RM10/I-1S-12PD		4322 021 34061		95-08-20 ~~99-04-26~~ ~~2000-03-07~~ ~~2003-07-24~~ 2005-09-01
2000-03-07					
NAME M.Veekens NAAM MPA	SUPERS. VERV.	001 SH BL.	SH BL. 112 – 001	069	A3
CHECK CONTR.	DAT. 90-10-08	Property of Eigendom van	© FERROXCUBE 2000		