


PROPOSED PAD ARRANGEMENT:

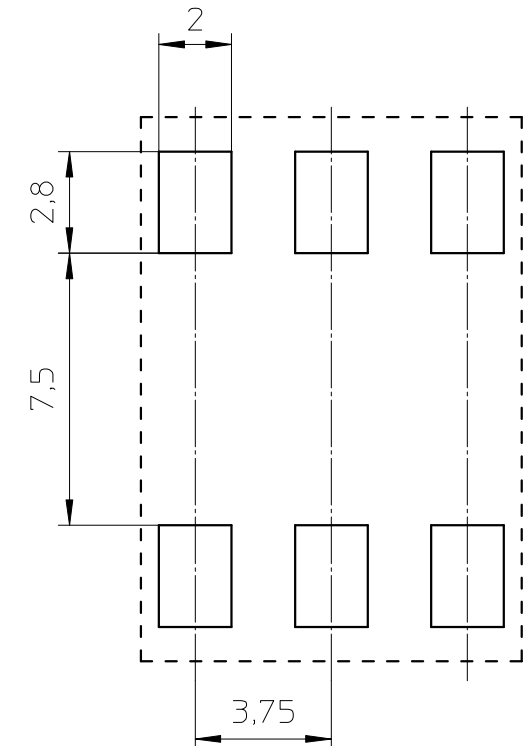

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced
 UL filenumber: E54705 - UL94V-0.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: 180°C.
 Resistance to soldering heat: 430°C - 2sec.
 Solderability: IEC 60 068-2-20 Part 2, Test Ta, method 1.
 Winding area: 8,4 mm². (1,46x5,75)
 Mean length of turn: 19,8 mm.

CLASS.NO.	CPVS-RM4-1S-6P		4322 021 00541		93-04-06
97-02-14					93-09-06
					97-02-14
					99-10-06
					06-06-28
NAME NAAM	A.Wojtasz	SUPERS. VERV.	001	SH SH BL BL	112 - 001
MPA	CHECK CONTR.	DAT.	93-04-06	Property of Eigendom van	069
					A3