

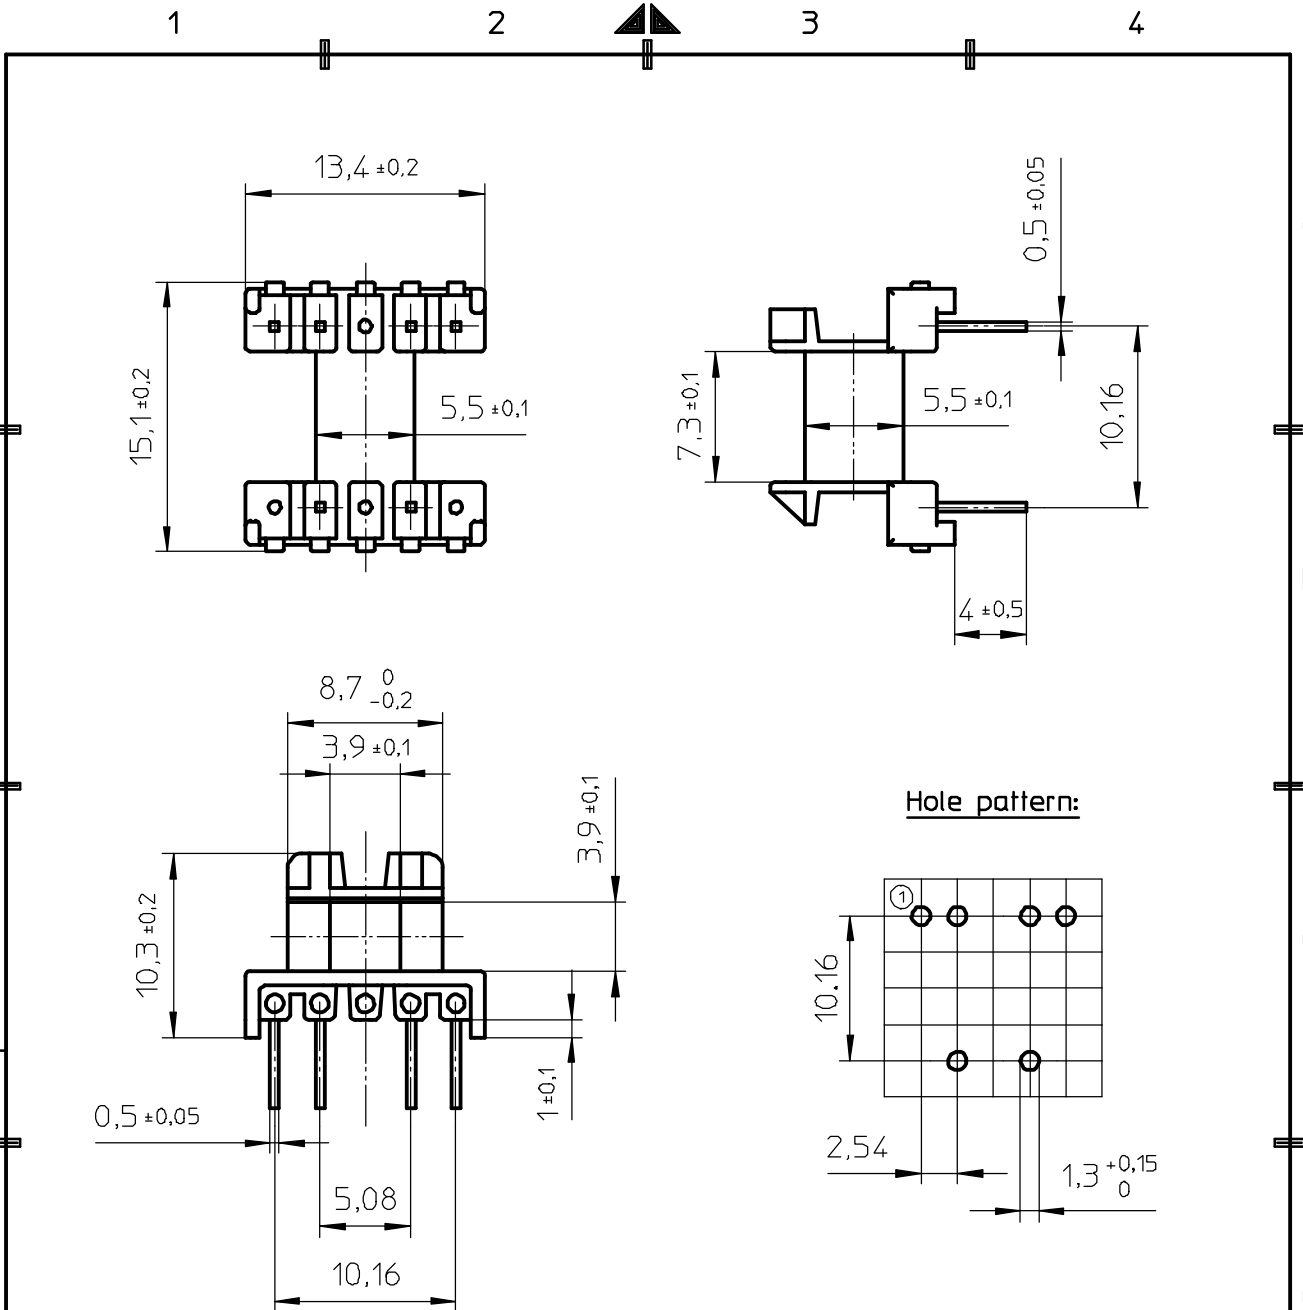




FERROXCUBE



Hole pattern:

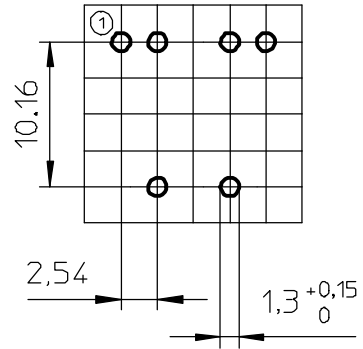

Coil former material: PM T355J (PF), glass-reinforced.
 UL file number: E59481 - UL94V-0.
 Pin material: Copper-clad steel, SnPb plated.
 Max. operating temp.: acc. to IEC 85 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C-3,5sec.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 10.4 mm²
 Mean length of turn: 29.6 mm.

CLASS NO.		CSH-E13/7/4-1S-6P-C		4322 021 04151		02-05-14	
NAME NAAM	T jon	SUPERS. VERV.	1	SH BL	112	-	001 010
MPA	CHECK CONTR.	DAT.	02-05-14	Property of Eigendom van	© FERROXCUBE 2000		
							A4