

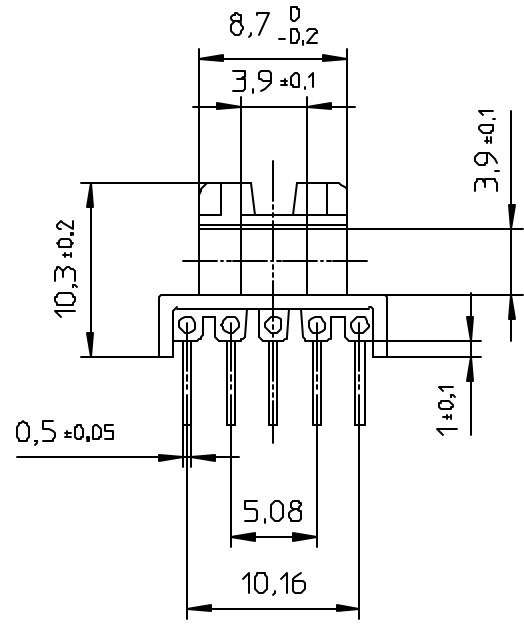
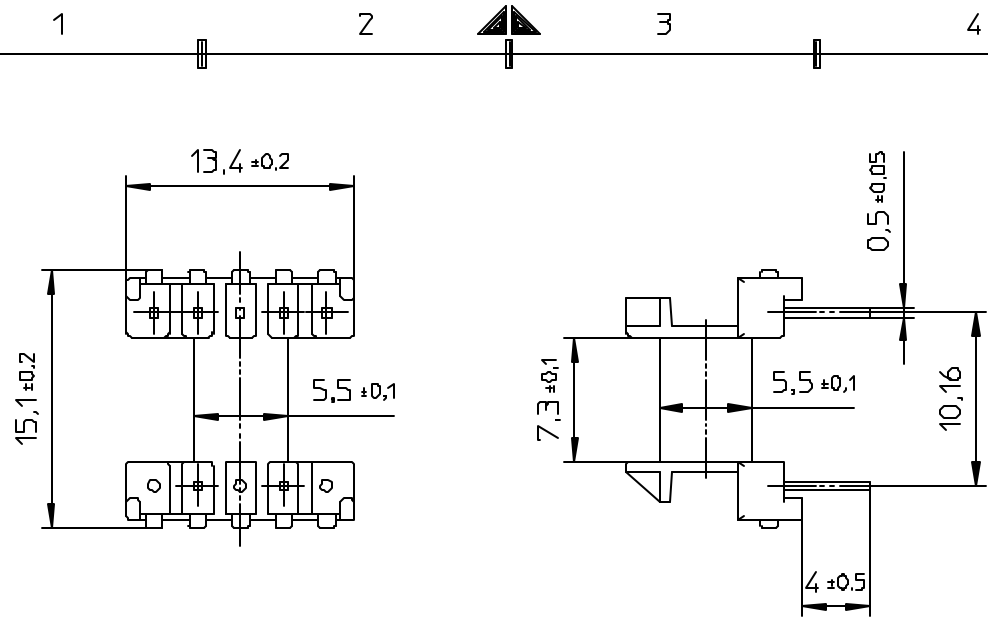




**FERROXCUBE**



Hole pattern:

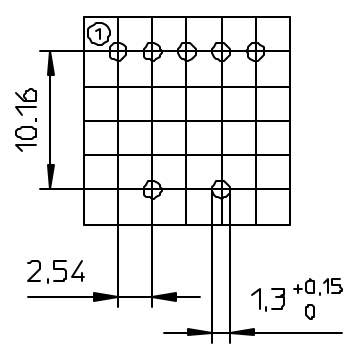

Coil former material: PM T355J (PF), glass-reinforced.  
 UL file number: E59481 - UL94V-0.  
 Pin material: Copper-clad steel, SnPb plated  
 Max. operating temp.: acc. to IEC 85 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C-3,5sec  
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area: 10,4 mm<sup>2</sup>  
 Mean length of turn: 29,6 mm.

CLASSNO.			03-01-17
	CSH-E13/7/4-1S-7P-C	4322 021 04421	

NAME NAAM	Tjan	SUPERS VERV.		1 SH BL	112 - 001	010	A4
MPA	CHECK CONTR.	DAT	03-01-17	Property of Eigendom van	© FERROXCUBE 2000		