



Proposed hole pattern:

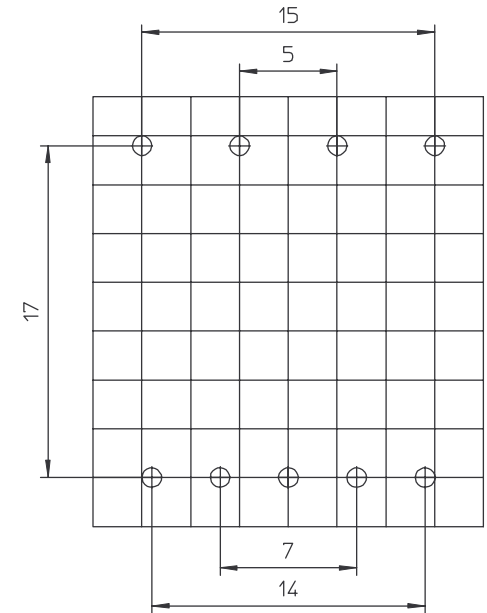

Coil former material: Sumikan PM-9820 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: Copper-clad steel, SnPb plated.
 Max. operating temp.: acc. to IEC 85 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C-3.5sec.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 40.2 mm .
 Mean length of turn: 46.4 mm.

CLASS.ND.		99-01-04	
		01-11-29	
NAME NAAM		CSH-E16/5-1S-9P	
MPA		4322 021 02761	
NAME NAAM	Tjon	SUPERS. VERV.	001
MPA	CHECK CONTR.	DAT.	99-01-04
Property of Eigendom van		112 - 01	A3
© FERROXCUBE 2000			