


**HOLE PATTERN:**  
Space requirement 14x14 pitch

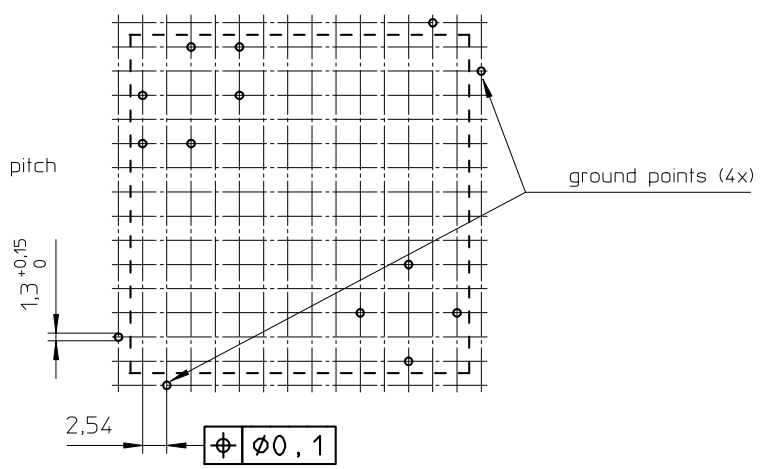

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.  
UL file number: E41429 - UL94V-0.  
Pin material: CuSn - Ni flash, Sn plated.  
Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5s.  
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.  
Min. winding area: 112 mm<sup>2</sup>.  
Mean length of turn: 71 mm.

CLASSNO.		07-11-08	
NAME		CSV-RM14-1S-10P-C	
NAAM		4322 021 07071	
MPA		07-11-08	
NAME	SUPERS.	1	07-11-08
NAAM	VERV.	112 - 001	010
CHECK	DAT.	07-11-08	© FERROXCUBE 2008
CONTR.	Property of		
	Eigenaam van		

07-11-08  
07-11-08  
09-12-08

A3