








c



d

HOLE PATTERN:

Space requirement 5x5 pitch.

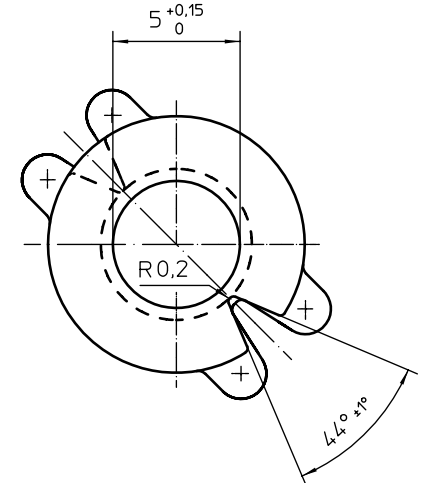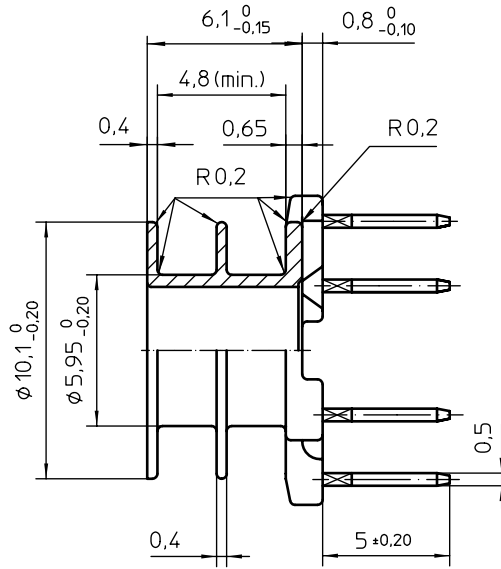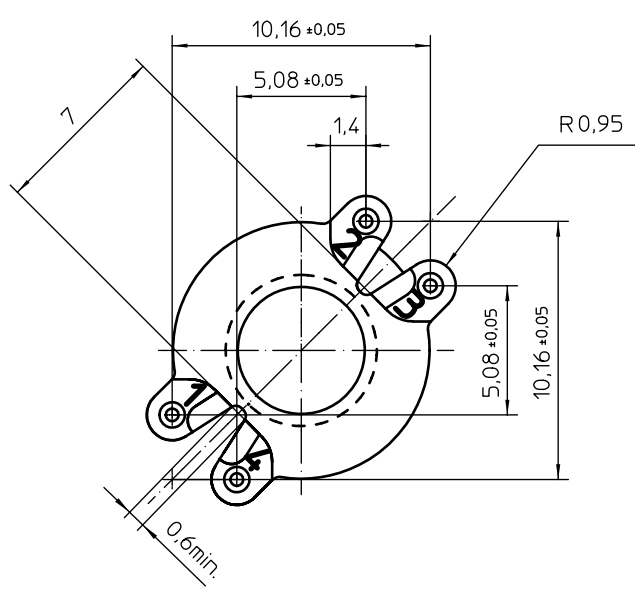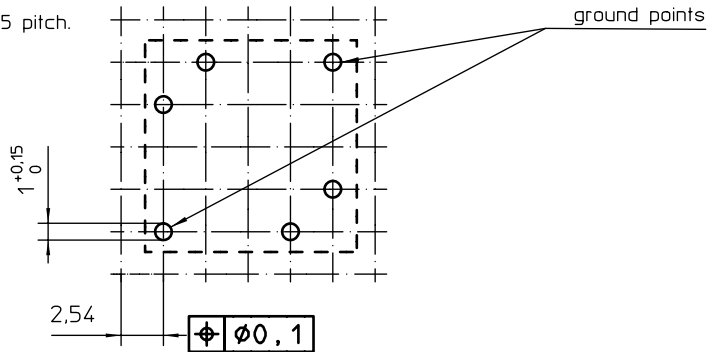

Coil former material: Vyncolite X611 (PF), glass-reinforced.  
 UL file number: E167521(M) - UL94V-0.  
 Pin material: CuSn - Ni flash, SnPb plated.  
 Max. operating temp.: acc. to IEC 85 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5s.  
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.  
 Min. winding area: 8,6 mm<sup>2</sup>.  
 Mean length of turn: 25 mm.

CLASSNO.		90-05-16	
		91-03-28	
		97-04-18	
		01-05-24	
		01-09-03	
NAME NAAM	M.Veekens	SUPERS. VERV.	1
MPA	CHECK CONTR.	DAT.	89-04-03
PROPERTY OF Eigendom van		112 - 001	010
		© FERROXCUBE 2000	

**CSV-RM5-2S-4P**

**4322 021 34481**

**A3**