


HOLE PATTERN:

Space requirement 5x5 pitch.

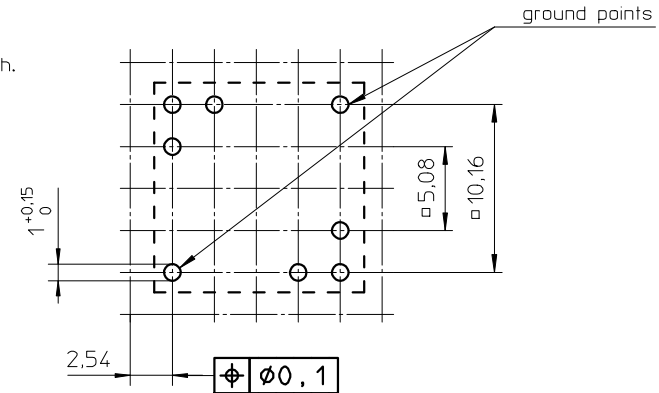

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
 UL file number: E61040 - UL94V-0.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 9,2 mm².
 Mean length of turn: 24,9 mm.

CLASSNO.		97-04-18	
90-01-26		00-05-02	
NAME: M. Veekens		00-08-01	
SUPERV.:		03-06-30	
M.P.A.		05-09-01	
CHECK CONTR.		A3	
DAT.: 89-04-03		Property of Eigenendom van	
1		SPR 112 - 001 010	
© FERROXCUBE 2000		4322 021 34501	