


HOLE PATTERN:

Space requirement 6x6 pitch.

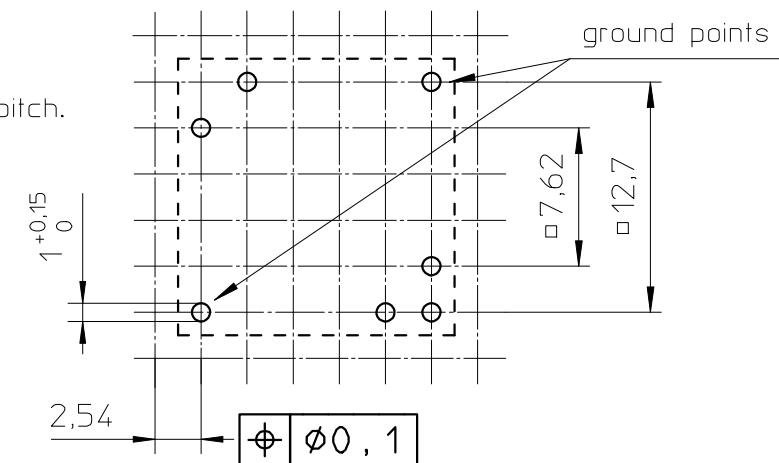

Coil former material: Bakelite UP 3420 (UP), glass-reinforced.  
 UL file number: E61040 - UL94V-0.  
 Pin material: CuSn - Ni flash, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.  
 Min. winding area: 15 mm<sup>2</sup>.  
 Mean length of turn: 30 mm.

CLASS.NO.	CSV-RM6S-1S-5P-G		4322 021 01391	00-05-05	00-08-01	02-04-04	03-06-30	05-09-01	
00-05-05									
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH BL.	SH BL.	112	- 001	010	A3
MPA	CHECK CONTR.	DAT.	95-05-18	Property of Eigendom van		© FERROXCUBE 2000			