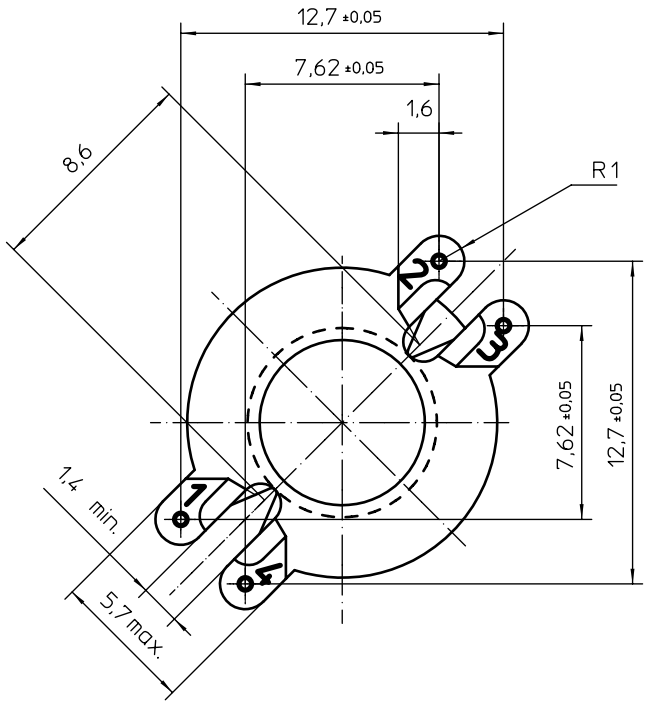

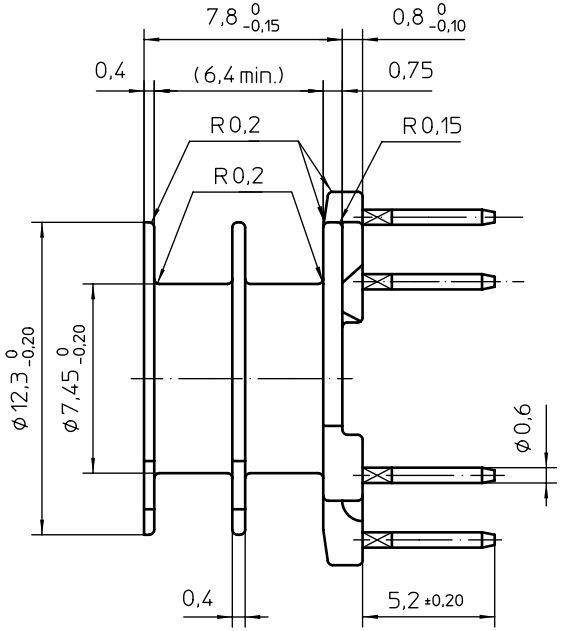

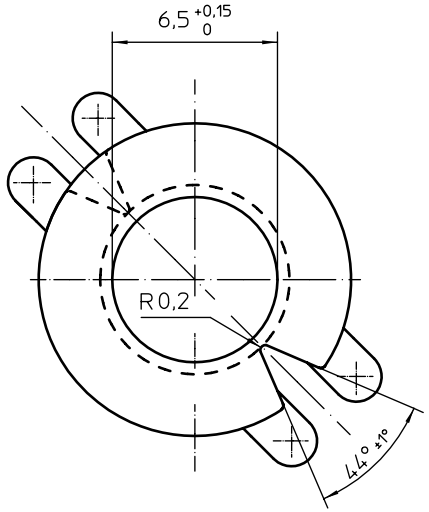

HOLE PATTERN:

Space requirement 6x6 pitch.

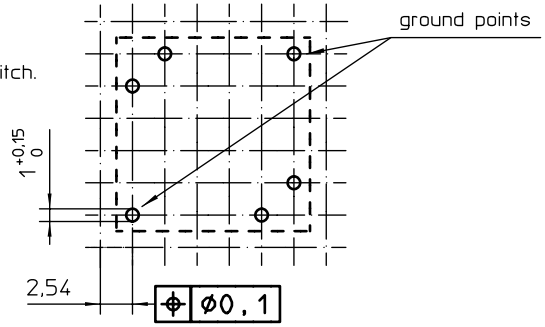

Coil former material:	Vyncolite X611 (PF), glass-reinforced. UL file number: E167521(M) - UL94V-0.
Pin material:	CuSn - Ni flash, SnPb plated.
Max. operating temp.:	acc. to IEC 85 class H, 180°C.
Resistance to soldering heat:	acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.
Solderability:	acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
Min. winding area:	14 mm^2.
Mean length of turn:	30 mm.

CLASS.NO.

CSV-RM6S/R-2S-4P

4322 021 34521

89-03-09
89-11-21
90-05-16
97-04-18
98-12-04

NAME NAAM M.Veekens | SUPERS. VERV. | 1 SHEET BLAD 112 – 001 | 010 | A3

MPA | CHECK CONTR. | DAT. 89-03-09 | Property of Eigendom van | © FERROXCUBE 2000