


HOLE PATTERN:

Space requirement 8x8 pitch.

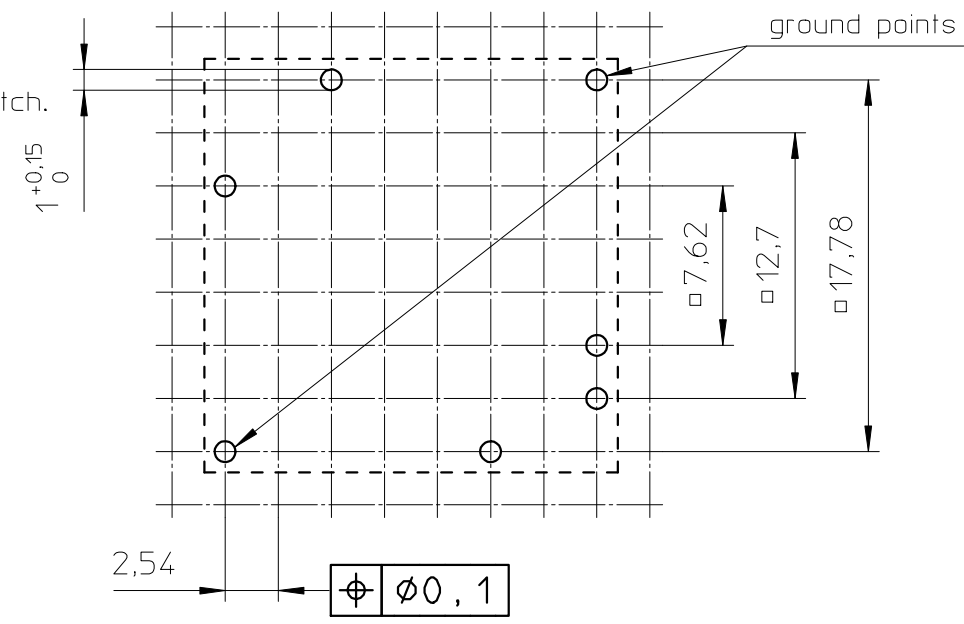

- Coil former material: Bakelite UP 3420 (UP), glass-reinforced.
UL file number: E61040 - UL94V-0.
- Pin material: CuSn - Ni flash, Sn plated.
- Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
- Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.
- Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
- Min. winding area: 30 mm².
- Mean length of turn: 42 mm.

| | | | | | | |
|-----------------------------|----------|--|-------------------|--|----------------|----------|
| CLASS.NO. | 89-12-15 | | 112 - 001 | | 010 | 04-09-28 |
| NAME NAAM | | | M.Veekens | | 05-09-01 | |
| CHECK CONTR. | | | MPA | | 97-04-18 | |
| DAT. | | | 89-03-15 | | 00-05-02 | |
| Property of Eigendom van | | | © FERROXCUBE 2000 | | 00-08-01 | |
| CLASS.NO. | | | CSV-RM8-1S-5P | | 4322 021 34661 | |
| NAME NAAM | | | M.Veekens | | A3 | |