


**HOLE PATTERN:**

Space requirement 8x8 pitch.

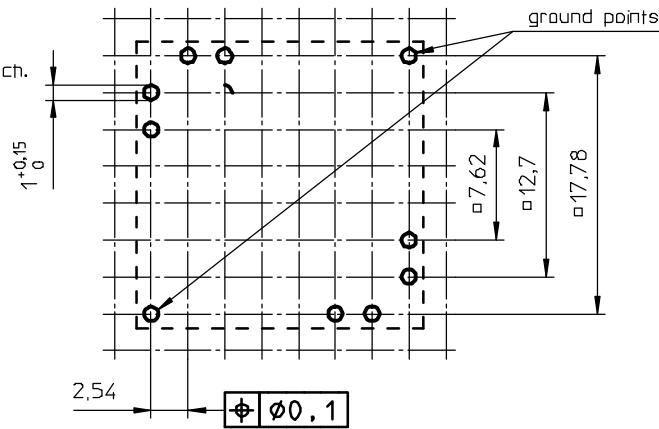

Coil former material:

Bakelite UP 3420 (UP), glass-reinforced.

UL file number: E61040 - UL94V-0

Pin material:

CuSn - Ni flash, Sn plated.

Max. operating temp.:

acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area:

30 mm<sup>2</sup>.

Mean length of turn:

42 mm.

CLASS NO.		04-09-28	
		90-05-16	
89-12-15		97-04-18	
		00-05-02	
		00-08-01	
NAME M. Veekens	SUPERS YEVV.	1	SP BL 112 - 001 010
MPA	CHECK CONTR.	DATE 89-03-15	Property of Eigendoms van © FERROXCUBE 2000

CSV-RM8-2S-8P

4322 021 34701

04-09-28  
90-05-16  
97-04-18  
00-05-02  
00-08-01

A3