




Pull-out force:
min. 9N per pin.

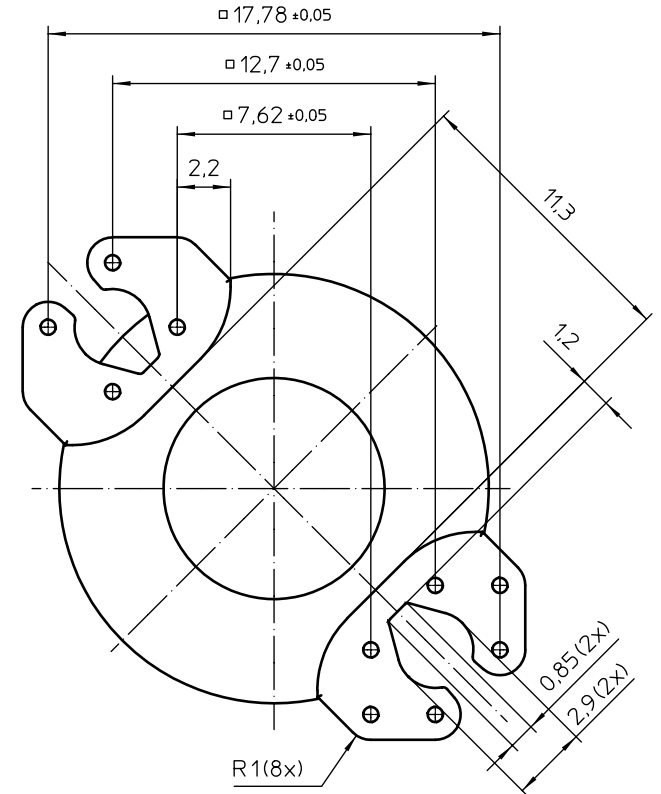

HOLE PATTERN:

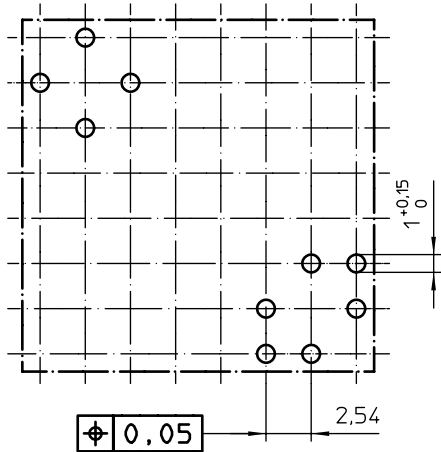

Coil former material:

Sumikon PM9630 (PF), glass-reinforced.
UL file number: E41429(M) - UL94V-0.

Pin material:

Copper-clad steel, SnPb plated.

Max. operating temp.:

acc. to IEC 85 class F, 155°C.

Resistance to soldering heat:

acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5s.

Solderability:

acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area:

13.3 mm²

Mean length of turn:

41.8 mm.

CLASSNO.		97-05-07	
97-08-15		97-08-15	
NAME NAAM		M.Veekens	
SUPERV. VERV.		1	
CHECK CONTR.		112 - 001	
DAT.		97-05-07	
Property of Eigendom van		069	
© FERROXCUBE 2000		A3	

CSV-RM8/LP-1S-10P

4322 021 01931

97-05-07
97-08-15
98-06-10
99-02-10
99-08-18