

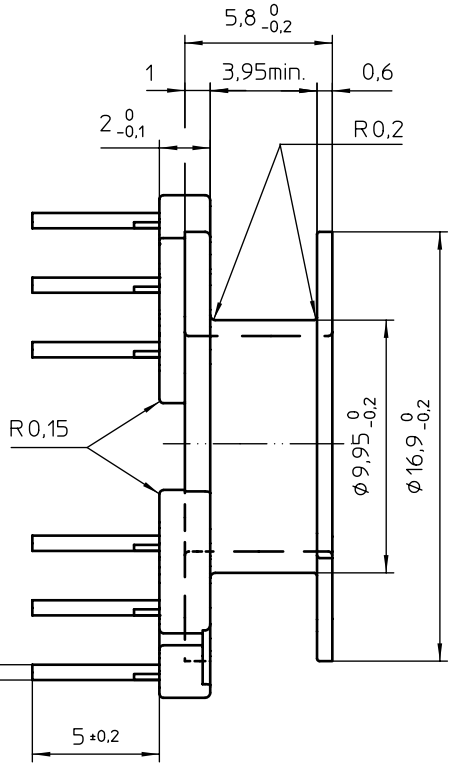
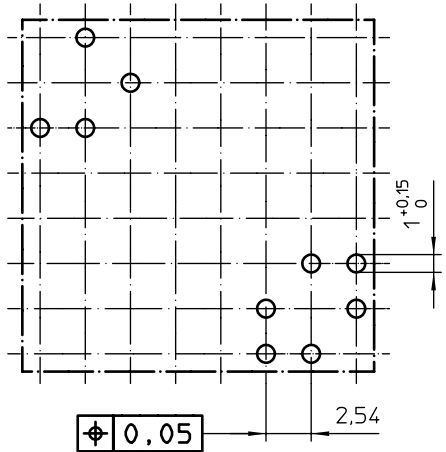


HOLE PATTERN:



Pull-out force:  
min. 9N per pin.

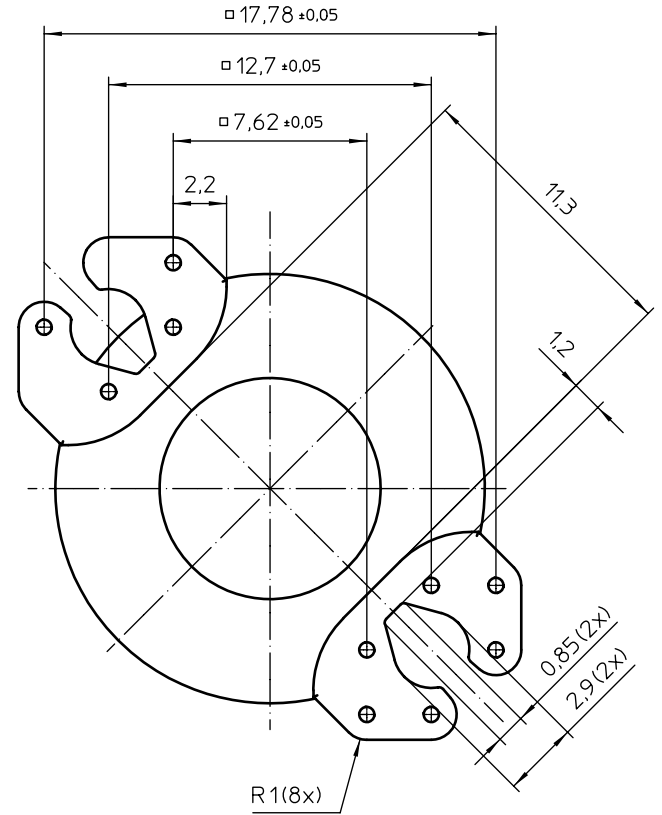

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
UL file number: E41429(M) - UL94V-0.

Pin material: Copper-clad steel, SnPb plated.  
Max. operating temp.: acc. to IEC 85 class F, 155°C.  
Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.  
Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.  
Min. winding area: 13,3 mm<sup>2</sup>  
Mean length of turn: 41,8 mm.

CLASSNO.					97-06-17
					98-01-28
					98-06-10
					99-08-18
NAME NAAM	M.Veekens	SUPERS. VERV.		1	112 - 001
MPA	CHECK CONTR.	DAT.	97-06-17	Property of Eigendom van	069
					A3
			4322 021 02321		
© FERROXCUBE 2000					

CSV-RM8/LP-1S-10P-T

4322 021 02321