



FERROXCUBE



c






d





e

f

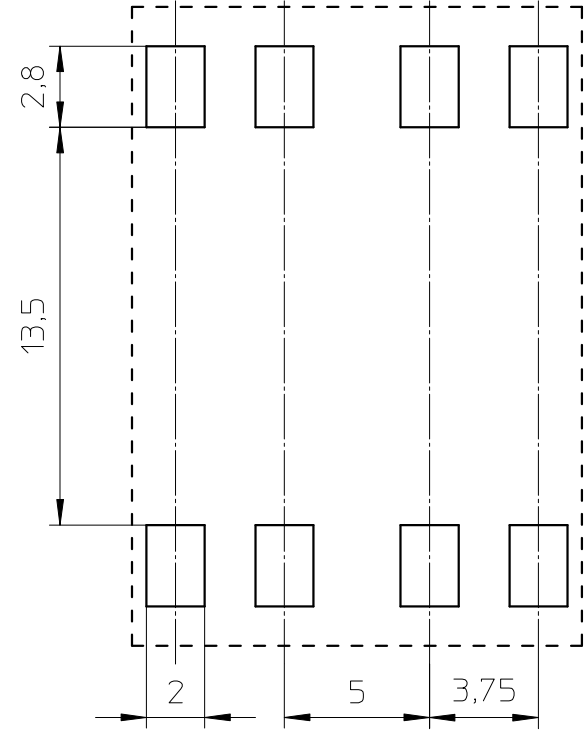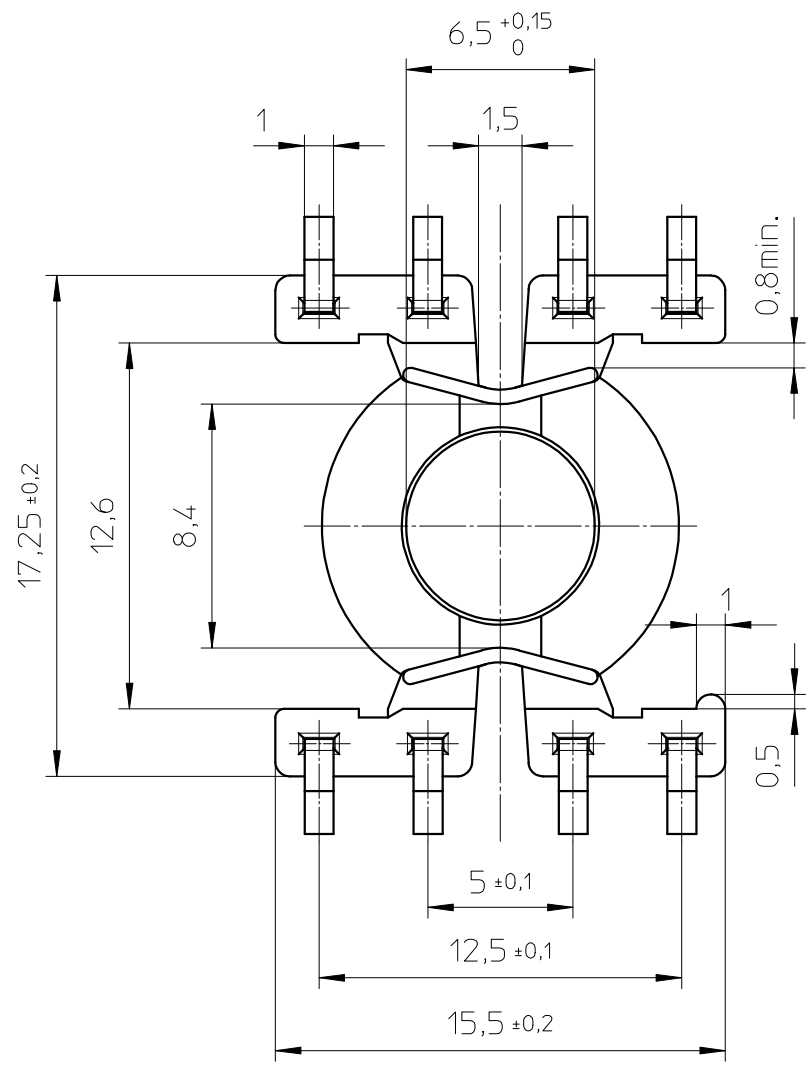

PROPOSED PAD ARRANGEMENT:

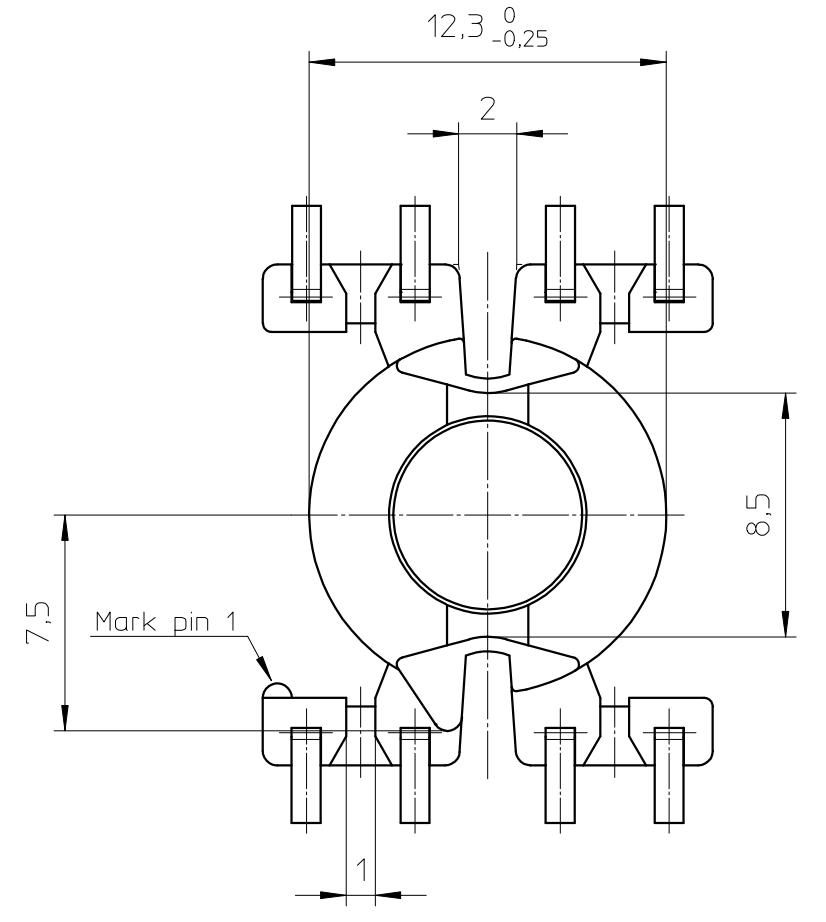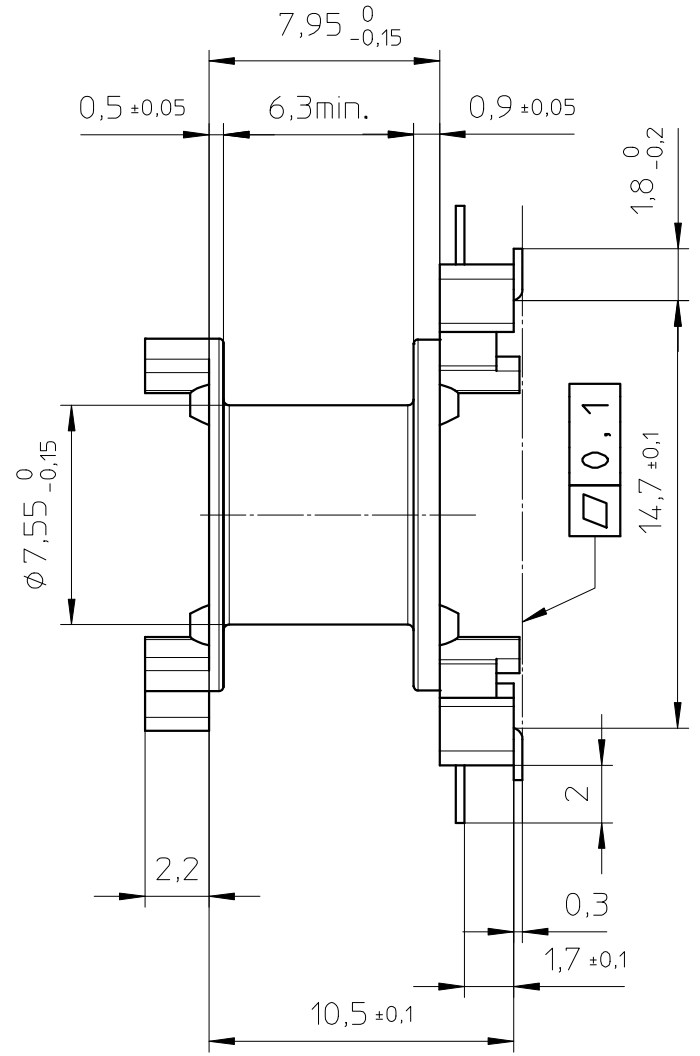

Coil former material: Sumikon PM9630 (PF), glass-reinforced.
 UL file number: E41429(M) - UL94V-0.

Pin material: CuSn6, Sn plated.


Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5s.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.

Min. winding area: 14,2 mm².

Mean length of turn: 31,4 mm.



CLASS.NO.	00-01-21		001 SH SH BL BL		112 - 001	069	99-07-01	99-07-01	99-09-13	00-01-21	00-05-16	05-03-07
NAME NAAM	M.Veekens		SUPER. VERV.									
MPA	CHECK CONTR.	DAT.	Property of Eigendom van		© FERROXCUBE Nederland BV 2005							
CSVSV-RM6S-1S-8P-B			4322 021 03411									A3