



MOUNTING PARTS

General data and ordering information


ITEM	REMARKS	FIGURE	TYPE NUMBER
Tag plate	material: phenolformaldehyde (PF), glass reinforced	4	TGP-P30/19-9P
	flame retardant: in accordance with "UL 94V-0"; UL file number E167521(M)		
	maximum operating temperature: 180 C, "IEC 60085", class H		
	pins: copper-tin alloy (CuSn), tin-lead alloy (SnPb) plated		
	resistance to soldering heat in accordance with "IEC 60068-2-20", Part 2, Test Tb, method 1B: 350 C, 3.5 s		
	solderability in accordance with "IEC 60068-2-20", Part 2, Test Ta, method 1: 235 C, 2 s		
Container	copper-zinc alloy (CuZn), SnPb-plated	5	CON-P30/19
	earth pins: presoldered		
Spring	CrNi-steel	6	SPR-P30/19
	spring force: 250 N when mounted		
Nut	copper-zinc alloy, nickel-plated	7	NUT
Bush	copper-zinc alloy, nickel-plated	8	FIB
Clamp	spring steel, tin-plated	9	CLM/TS-P30/19

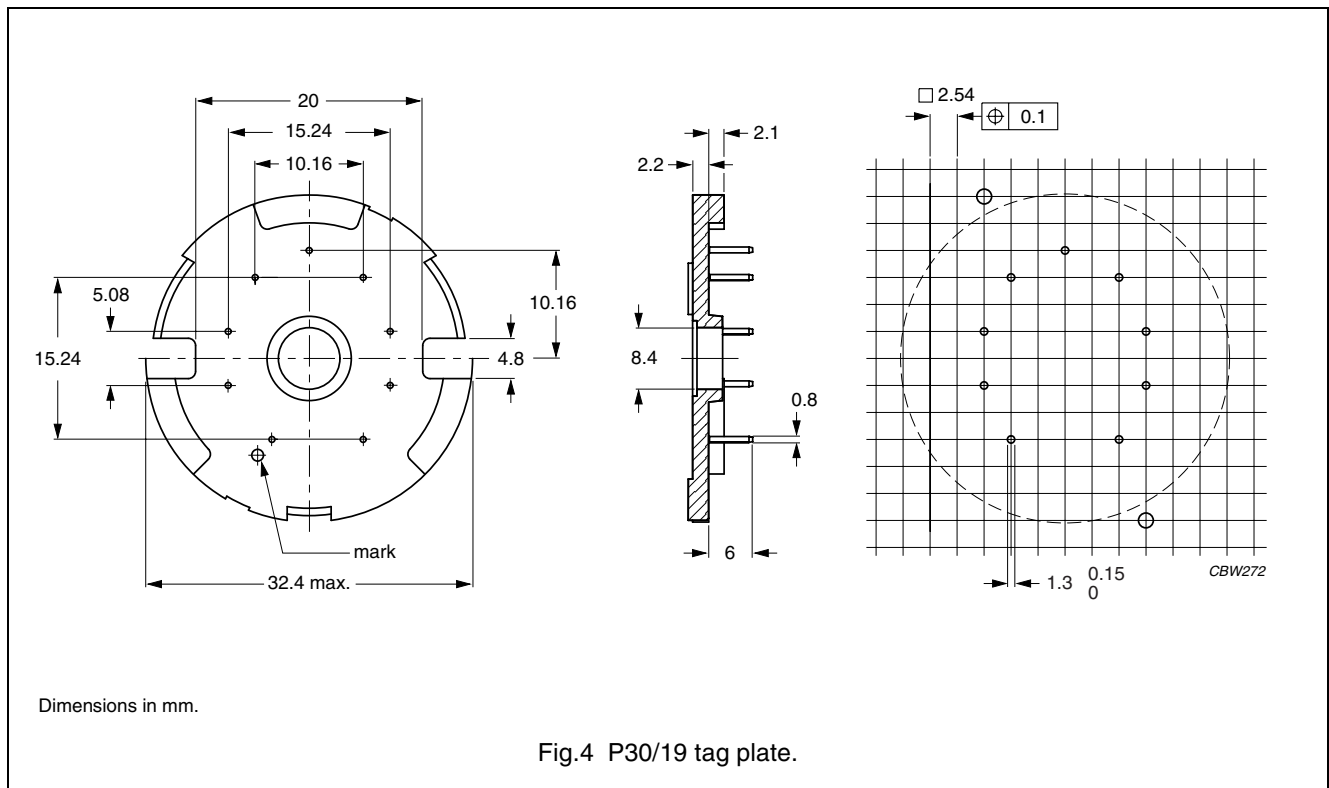

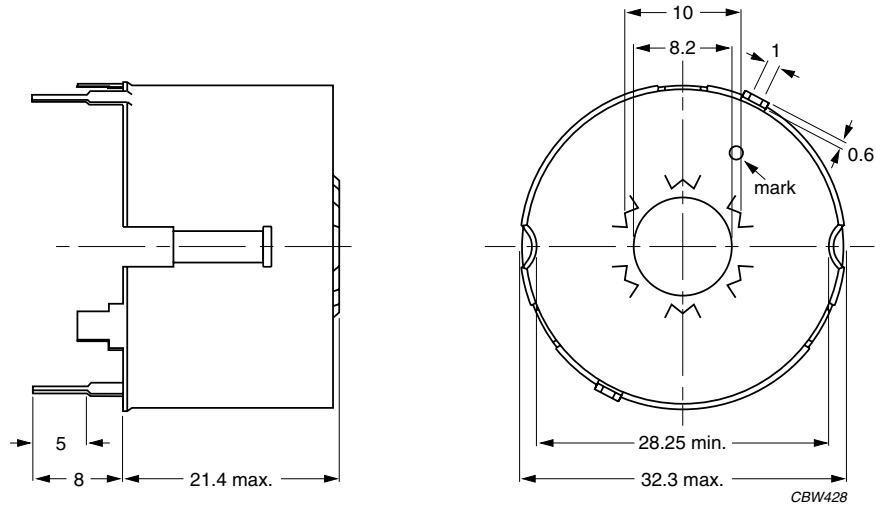

Dimensions in mm.

Fig.5 P30/19 container.

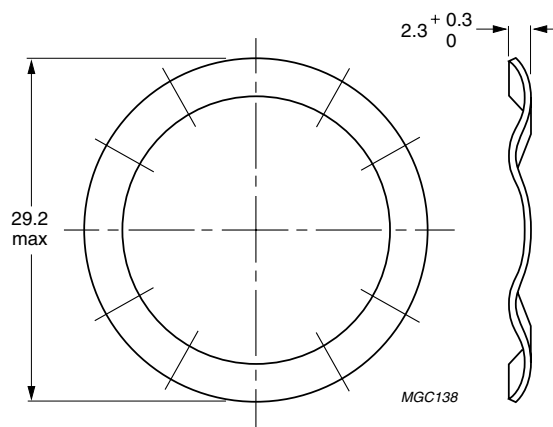

Dimensions in mm.

Fig.6 P30/19 spring.

